

OPERATING INSTRUCTIONS

We greatly appreciate your purchase of our wired clip-on mini microphone. To be sure you are using your microphone properly, please read these instructions carefully.

How To Operate


1. Open the battery cover (1) and insert the battery (2) with the correct polarity.
2. Close the battery cover (1) and plug the mic into the input socket of your amplifier.
3. Press the switch (3) to ON.
4. Clip the microphone to your collar. Keep at least 3-5 inches from your mouth. Use the volume control of the amplifier to get the sound how you want it.

ATTENTION

When using the microphone, if the sound is poor, please change your position or adjust the microphone volume of the amplifier. If the volume is too low, you can adjust the microphone volume of the amplifier or replace the battery.

SPECIFICATION AND SIZE

Frequency response	30Hz-20KHz
Connecting wire	$\phi 2 \times 5000\text{mm}$ or $\phi 2 \times 1000\text{mm}$
Battery Size	1 x AA
Operating voltage	AG 1.3v-1.5v
Weight	200g

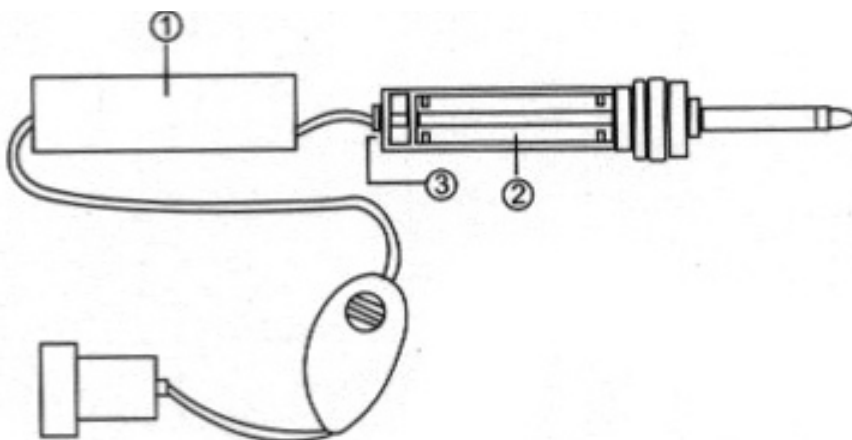

PYLE[®]

www.pyleaudio.com