


# Cloud Box

Serenelife Cloudbox Quick Start Guide

## Product Diagram

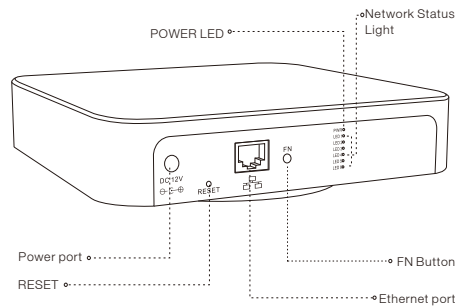

Function	Description
POWER LED	Red light shows normal power supply.
Network LED	Flashing LEDs show data is at the unit
Power port	12V-5A external power
Ethernet port	External WAN port
FN Button	Reserved for features in development
RESET	Press and hold for 5-10 seconds while powered and plugged into data. The box will reset to factory default settings.

## Before-operation introduction

Note: Please refer to the Hard drive installation guide before proceeding


Download the mobile app "Serenelife" from the Apple store or Google Play.

Make sure you have set up an account and have connected Serenelife camera to the app - The cloud box requires a camera already set up to function.

Before adding the cloud box to the camera's storage device, please make sure both your APP and the cloud box and the camera are up to date. Camera firmware must be Version 2.0 or later.


## Connect Box

Connect the box to power and a wired ethernet connection to your wireless router. Allow 2-3 minutes for the box to boot up. Once complete - you should see the network light flashing green once every 2-3 seconds.

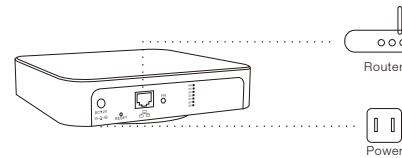


## Add Cloud Box


① Login with account then enter the camera list

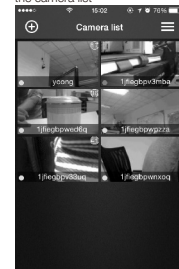


② Click the adding symbol on top left

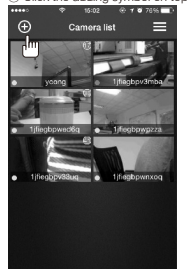

③ Scan QR code to add box ID

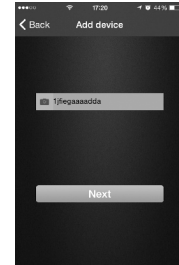

④ Change password

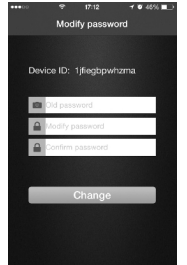


When prompted to select your home WiFi network select "Skip" -The Cloud Box is not equipped with WiFi

For more instructions FAQ and contact us - check us out on the web at [www.serenelifehome.com](http://www.serenelifehome.com)


## Camera configuration to cloud box

Note: Please check that camera's firmware is up to date, if not please upgrade it to the latest version.

① Access the device list

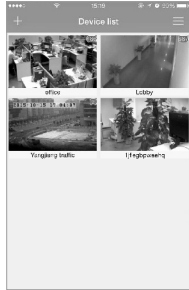


② Click the camera icon

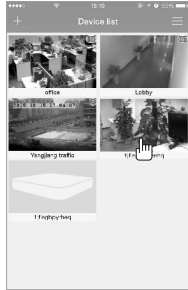


③ Click 'settings'




④ Choose 'storage device'

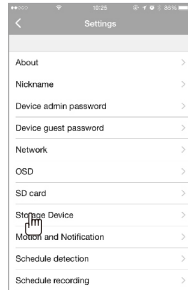

⑤ Click 'enable' button

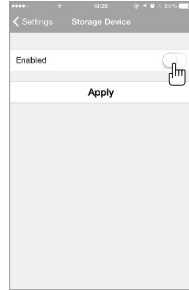

⑥ Input the ID and password, click "Apply"

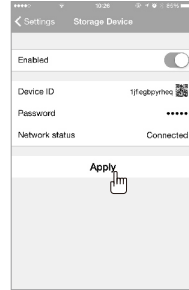


Note: Cloud Box browser viewing : <http://cloud.serenelifehome.com/>

## Recording Play-back

① Access device list, click box icon



② Choose the relative camera

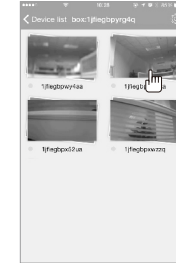

③ Select video



④ Play back



Note: Recording records under each camera are for SD recordings only.

## Notes:

The cloud box is not equipped with WiFi - Make sure to use only with a wired ethernet connection

The cloud box must be on the same network as the camera you wish to record to it.

No need to reformat or setup the HD before installing in the cloud box. We have our own unique program system to format the data in HD automatically.

HD Compatibility Requirements:  
 -3.5" Size Only  
 -2TB Max Storage  
 -No minimum storage requirement


If you record the videos via cloud box, you can only access the video from the cloud box entry not the camera's "records" section.

You can download the videos from both Android and Apply Application, no network limitation, the faster network speed the better.

Video downloads are working from both apple and android apps on any network after you apply the updates. But the sharing video need to be downloaded in the same network.

SereneLife

1.Plug the leading wire to the hard disk port

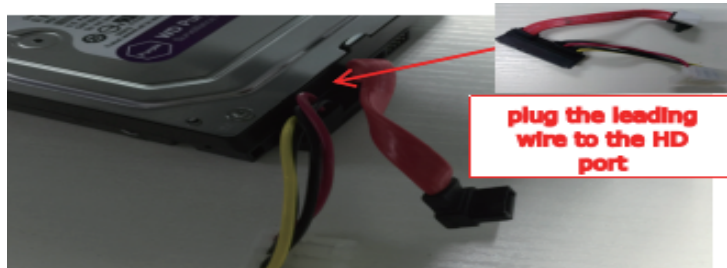


2.Put the hard disk into the bottom case,and check if it's wellfixed.



3.Plug the SATA leading wire to the CN2 socket of the PCB


4.Install the hard disk power cable into the CN4 socket of the PCB

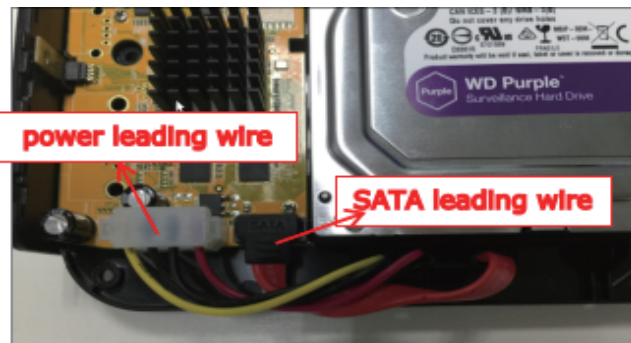


5.Put on the top case from the lead wire end and check to ensure it won't press down on the SATA wire(may cause bad contact), do not fasten the top case vertically.



6. Put on the 4pcs KM6#×6 screws to the bottom case in order to fix the hard disk.

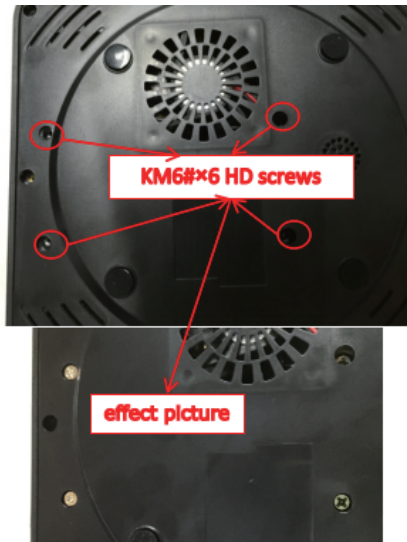

7. Put on the 8pcs PM3×7 silver screws to the bottom case in order to fix the top case.

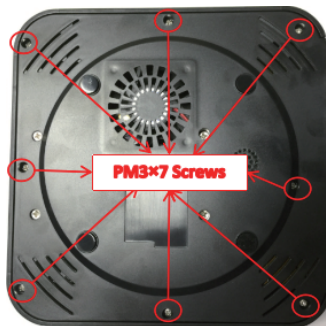

## Notes:

1. The 8pcs PM3×7 screws need to be removed so the box is open.
2. Please do not open the cloud box while plugged into power or pick up while on.
3. The “SATA leading wire” and the “power leading wire” are already attached at the board.