

# 15W Moving Dance Light

Multi-Color LED Stage Light - DJ Sound  
& Studio Lighting System (Kaleidoscope)

**PYLE**  
PyleUSA.com

**USER GUIDE**

## Features:

- Multi-Color Lighting System
- Used by DJs & Vocal Stage Performers
- LED Illumination Light Source
- High-Powered Electronic Plug-in Design
- Simple & Hassle-Free Operation
- Motorized Automatic Mode Movement Ability
- Configurable Horizontal & Vertical Light Alignment
- Digital LCD Display with Button Controls
- Colors: Red, Green, Blue, White (RGBW)
- Electronic Strobe Mode with Pulsing & Randomized Light Patterns
- Adjustable & Configurable Lighting FX Effects Settings
- Speed Adjustable Strobe Effect Illumination
- Dimmer Configurable Settings
- Perfect for On-Stage DJ Shows, Concerts & Studio Performances



## What's in the Box:

- LED Stage Lighting System
- Power Cable

## Technical Specs:

- Voltage Power: AC100/240V, 50/60Hz
- Light Source Power: 30 Watt
- Light Source 1: 1x15W RGBW, 4-in-1 LED
- Light source 2: 36 Pcs. x 0.3w SMD5050 RGB, 3-in-1 LED
- Light source 3: 1 Pc. x 150mA Green Laser
- Connector Type: Digital Multiplex (DMX) Standard
- DMX Channels: 15-Channel
- X-Axis: 540° Degree
- Y-Axis: 270° Degree
- Dimmer: 0~100% Linear Dimmer
- Motor Speed Adjustment Levels: 1-255
- Power Cable Length: 3.94 ft.
- Fuse: T5A
- Unit Dimensions (L x W x H): 5.3" x 4.7" x 7.28" -inches



**Please read these instructions carefully, which includes important information about the installation, usage and maintenance of this product.**

### **SAFETY INSTRUCTION**

- To reduce the risk of electrical shock or fire, do not expose this unit rain or moisture
- Do not spill water or other liquids into or on to your unit.
- Be sure that the local power outlet match that of the required volt-age for your unit.
- Do not attempt to operate this unit if the power cord has been frayed or broken. Disconnect from main power before making any type of connection.
- Do not remove the cover under any conditions.
- Never operate this unit when it's cover is removed.
- Never plug this unit in to a dimmer pack
- Always be sure to mount this unit in an area that will allow proper ventilation.
- Do not attempt to operate this unit, if it becomes damaged.
- During long periods of non-use, disconnect the unit's main power.
- Always mount this unit in safe and stable matter.
- Power-supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to the point they exit from the unit.
- **Heat-** The appliance should be situated away from heat sources, such as radiators, heat registers, stoves, or other appliances (including amplifiers) that produce heat.
- **The fixture should be serviced by qualified service personnel when:**
  - a. The power-supply cord or the plug has been damaged.
  - b. Objects have fallen, or liquid has been spilled into the appliance.
  - c. The appliance has been exposed to rain or water.
  - d. The appliance does not appear to operate normally or exhibits a marked change in performance.


**Caution!** *There are no user serviceable parts inside this unit. Do not attempt any repairs yourself, doing so will void your manufacturers warranty. In the unlikely event your unit may require service please contact us.*

### **Cleaning**

**Due to fog residue, smoke, and dust cleaning the internal and external optical lenses must be carried out periodically to optimize light output.**

1. Use normal glass cleaner and a soft cloth to wipe down the outside casing.
2. Always be sure to dry all parts completely before plugging the unit back in.  
Cleaning frequency depends on the environment in which the fixture operates (i.e. smoke, fog residue, dust, dew).

**SETTING:**

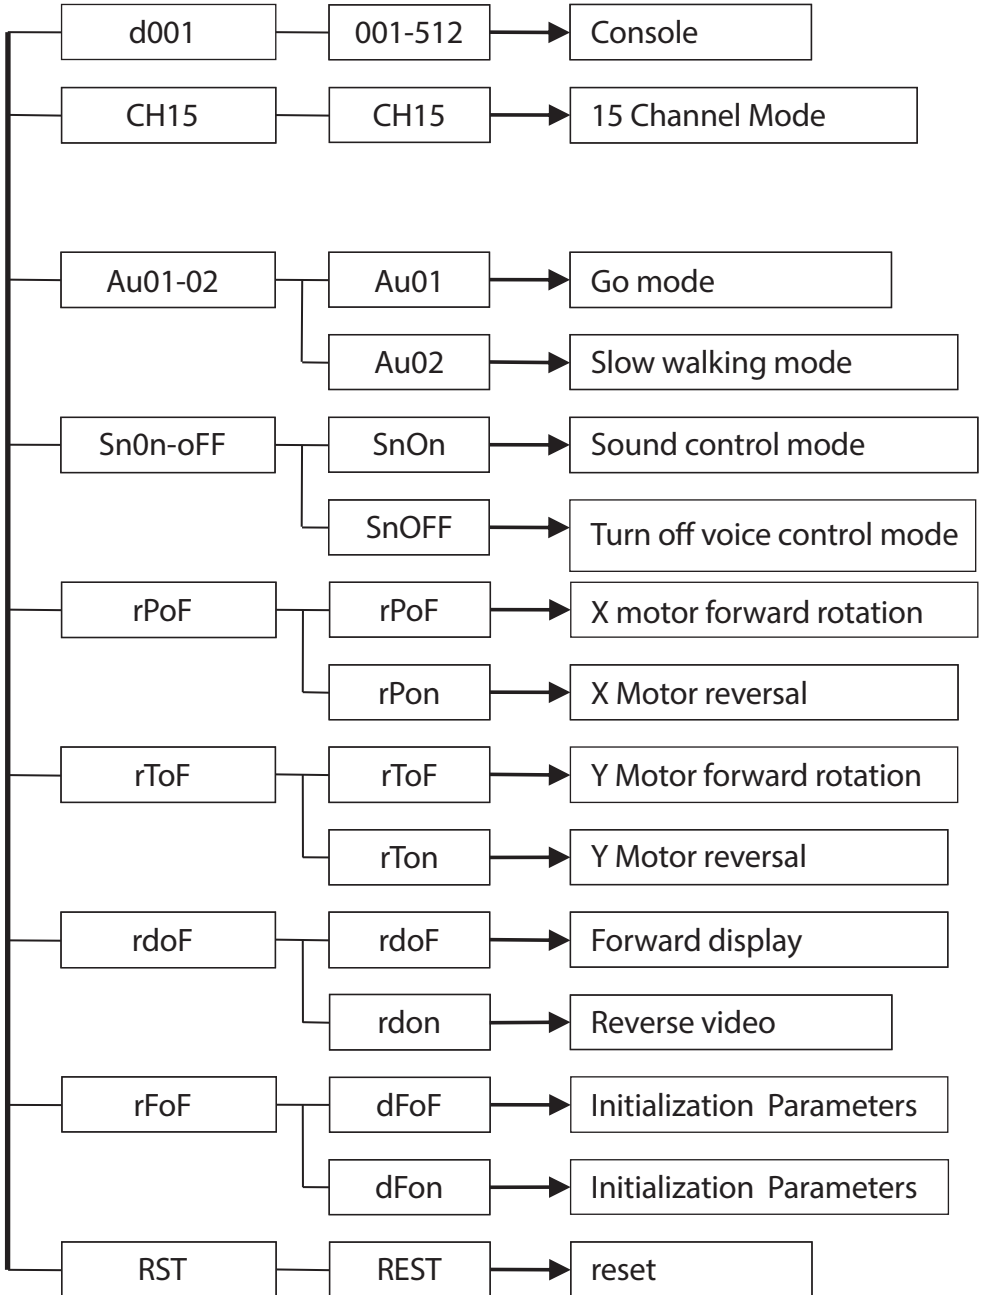

## 15 CHANNEL PATTERN

CHANNEL		FUNCTION
1	0-255	Horizontal
2	0-255	Horizontal fine tuning
3	0-255	perpendicular
4	0-255	Vertical fine tuning
5	0-255	Velocity
6	0-255	Total dimming
7	0-255	Stroboflash
8	0-255	Red dimming
9	0-255	Green dimming
10	0-255	Blue dimming
11	0-255	White dimming
12	0-255	Laser dimming
13	0-255	0-30 none 31-127 Self-walking1 128-249 Self-walking2 250-255sound control
14	0-255	0-4 Turn off the light belt 5-109 Lamp band color selection 110-255 Lamp belt self-walking
15	0-255	0-249 none 250-255 reset

### California Prop 65 Warning



#### WARNING:

This product contains Phthalates which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.

For more info go to: [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)

### Questions? Comments?

We are here to help!

Phone: (1) 718-535-1800

Email: [support@pyleusa.com](mailto:support@pyleusa.com)