


PDUSBPP10 Microphone XLR-to-USB Adaptor

USB Mic Interface with Volume Control, Easy USB Plug-and-Play (+48V Phantom Power)

User Manual

INSTALLATION- WINDOWS 7/8/10

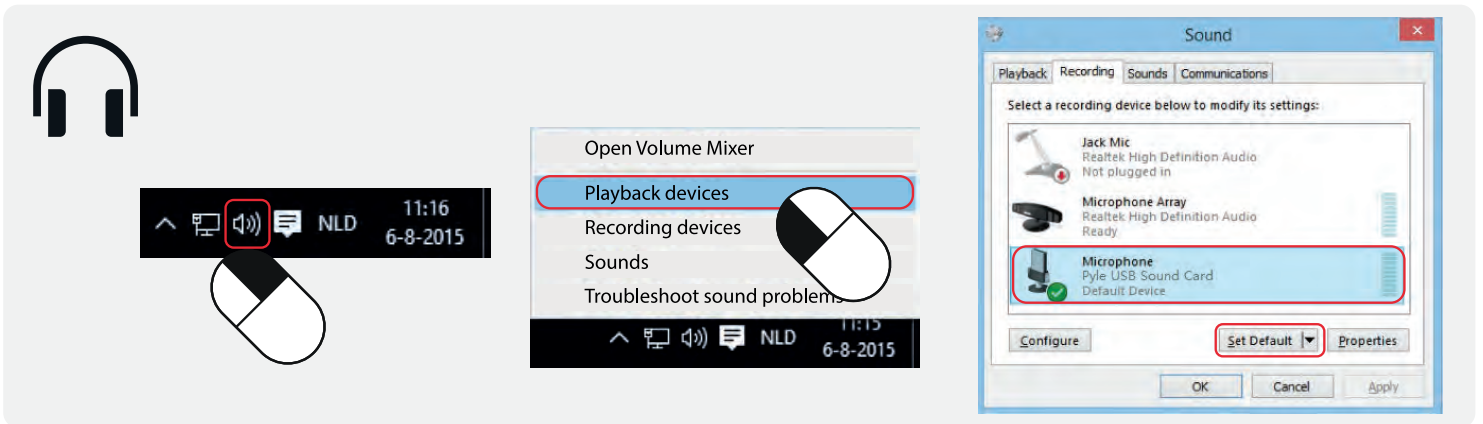


Headphones icon

Windows taskbar: Speaker icon circled in red, mouse cursor over it.

Context menu: Playback devices circled in red.

Sound Control Panel: Playback tab, "Microphone Pyle USB Sound Card" selected and circled in red, "Set Default" button circled in red.

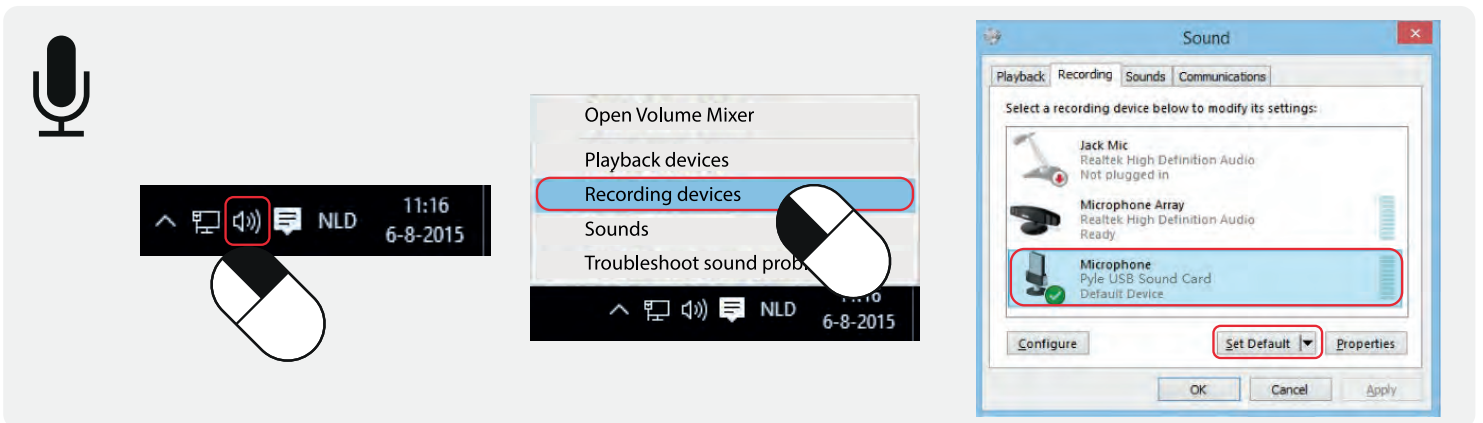

Microphone icon

Windows taskbar: Speaker icon circled in red, mouse cursor over it.




Context menu: Recording devices circled in red.

Sound Control Panel: Recording tab, "Microphone Pyle USB Sound Card" selected and circled in red, "Set Default" button circled in red.


CHANGE SOUND INPUT/OUTPUT ON MAC OS

1. On your Mac, choose Apple menu > System Preferences, click Sound, then click Output.
2. Select the device you want to use in the list of sound output devices.
For any device plugged into the computer's sound port, choose Microphones.
3. Do any of the following to adjust your sound output settings:
Adjust the balance or volume: Drag the volume slider.
Show a volume control in the menu bar: Select the "Show volume in menu bar" tickbox so you can turn the volume up or down from anywhere.




To set a separate volume for alert sounds, click Sound Effects.

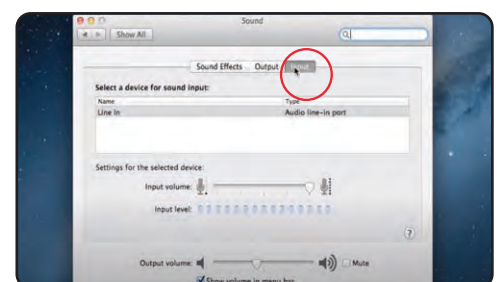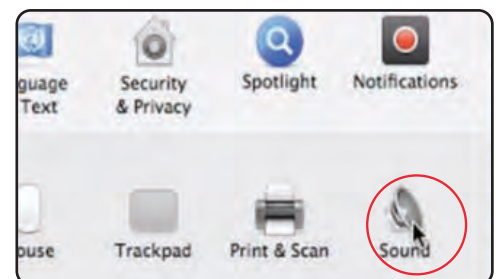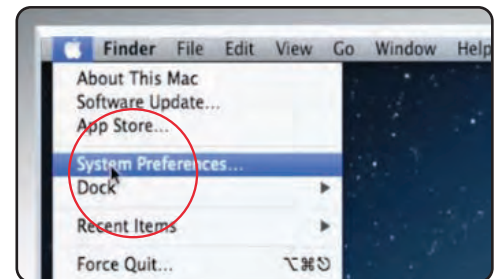


VOLUME CONTROL



Mic Volume Control

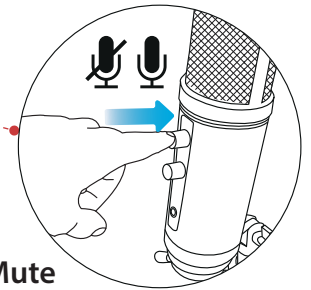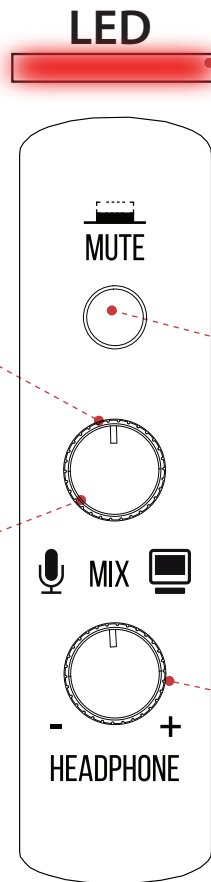

Mute



Headphone Volume Control

Features:

- Universal USB Microphone Adapter
- Allows the Use of XLR Microphones on Your Computer
- Simple 'Plug-and-Play' Operation
- Provides +48V Phantom Power
- Connects to Computer via Included USB Cable
- Adjustable Headphone Volume & Mix Audio Control
- Compact, Mini USB Audio Interface Design
- Universal Computer Compatibility: Works with PC, Mac, Linux
- For Home, Office & Business Use

What's in the Box:

- Mic Adaptor
- USB Cable

Questions? Issues?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com

Technical Specs:

- Connection Interface: USB Mini 2.0, Powered / XLR, 3-Pin
- Frequency Response: 20-20kHz
- Mic Gain: -15dB (22dB Max)
- S/N Ratio: 90dB
- Dynamic Range: 100dB
- T.H.D.: 0.9%
- Bit Depth: 24 bit
- Sampling Rate: up to 96kHz
- Construction Material: Engineered Aluminum Alloy
- Computer Operating System Support: Windows XP, Vista, 7, 8, 10, Mac OS X, Linux
- Power Output: USB-Powered, 500 mA
- USB Cable Length: 5.9' ft.
- Dimensions (L x W x H): 5.7" x 1.14" x 1.14" -inches



VISIT US ONLINE:

Have a question?

Need service or repair?

Want to leave a comment?

PyleUSA.com/ContactUs

PYLE