

PYLE

PyleUSA.com



PPHP109WMU

Wireless & Portable BT PA Speaker

Active-Powered Loudspeaker System, Built-in Rechargeable Battery,
USB/SD Readers, Includes Handheld Microphone,
Recording Ability, FM Radio (1000 Watt, 10" Subwoofer)

USER MANUAL

INDEX

Operation	2
User's General Instructions	3
Controls and Connections	4
Specifications	6



CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER [OR BACK]



THIS PRODUCT MUST BE EARTHED

NO USER-SERVICEABLE PARTS INSIDE, REFER SERVICING TO QUALIFIED SERVICE PERSONNEL

OPERATION

1. Prior to switching **ON**, turn volume down to minimum.
2. Connect the audio source to the appropriate input socket.
3. Connect to the mains supply.
4. Switch **ON** the audio source followed by the active speaker.
5. Set the volume with the applicable control.
6. Adjust the bass + treble.
7. When using the speaker using the built-in battery, if you find the MP3 screen flickering which indicates the battery voltage is low, turn **OFF** the speaker box and charge battery.
8. If you don't use the unit frequently, please do remember to charge the unit every three months to keep the battery in good condition.

Note: Please turn **OFF** the product when fully charged.


INSTRUCTIONS

- Do not overload the box to avoid damage to the speakers.
- Do not place to an open fire (candles etc) on top or next to the box- **FIRE HAZARD**
- Only connect to an earthed mains outlet of 110Vac/60Hz.
- For indoor use only. If the box will be used outdoors, you need to make sure that no humidity can enter the box.
- When not in use, unplug the unit from the mains.
- Unplug the unit from the mains prior to checking or replacing the fuse.
- Make sure that the box is placed on a stable, strong surface.
- The boxes can be hung. Use only strong and approved mounting material. During the mounting, make sure that nobody is standing below the mounting area.
- Do not place liquids on the box and protect it against humidity. Humidity can shorten the life time considerably.
- Only use suitable means of transportation if you want to move the box -
USE EXTRA CAUTION HANDLING THE BACK PANEL.
- Always unplug the unit during a thunderstorm or when it is not in use.
- If the unit has not been used for a long period of time, condensation can occur inside the housing. Please let the unit reach room temperature prior to use.
- Never try to repair the unit yourself.
It does not contain any user serviceable parts.
- Run the mains lead in such a way that nobody can fall over it and nothing can be put in it
- Set the unit to the lowest volume prior to switching it on.
- Keep the unit out of the reach of children.

Controls and Connections

- 1.** LED Screen
- 2.** Mp3 control
- 3.** SD Card Slot
- 4.** USB PORT
- 5.** Treble Control
- 6. Volume Control:**
Used to adjust the signal level from the Mp3/Line input/Microphone
- 7.** Bass control
- 8. Mic VOL:** Used to adjust the signal level from MIC1, MIC2 and VHF
- 9.** ECHO EFFECT FOR MICROPHONE
- 10/11. Mic Input:** 6.35mm Jack for a microphone input
- 12.** RCA line output
- 13.** Power ON/OFF LED
- 14.** Battery charging LED
- 15.** RCA line input
- 16.** Wireless microphone antenna
- 17.** Wireless microphone antenna
- 18.** External Power: DC 12V Input
- 19.** Voltage switch
- 20.** FUSE
- 21. AC Power:** Connect the incorporated AC power cord
- 22.** ON/OFF Power switch

Controls and Connections

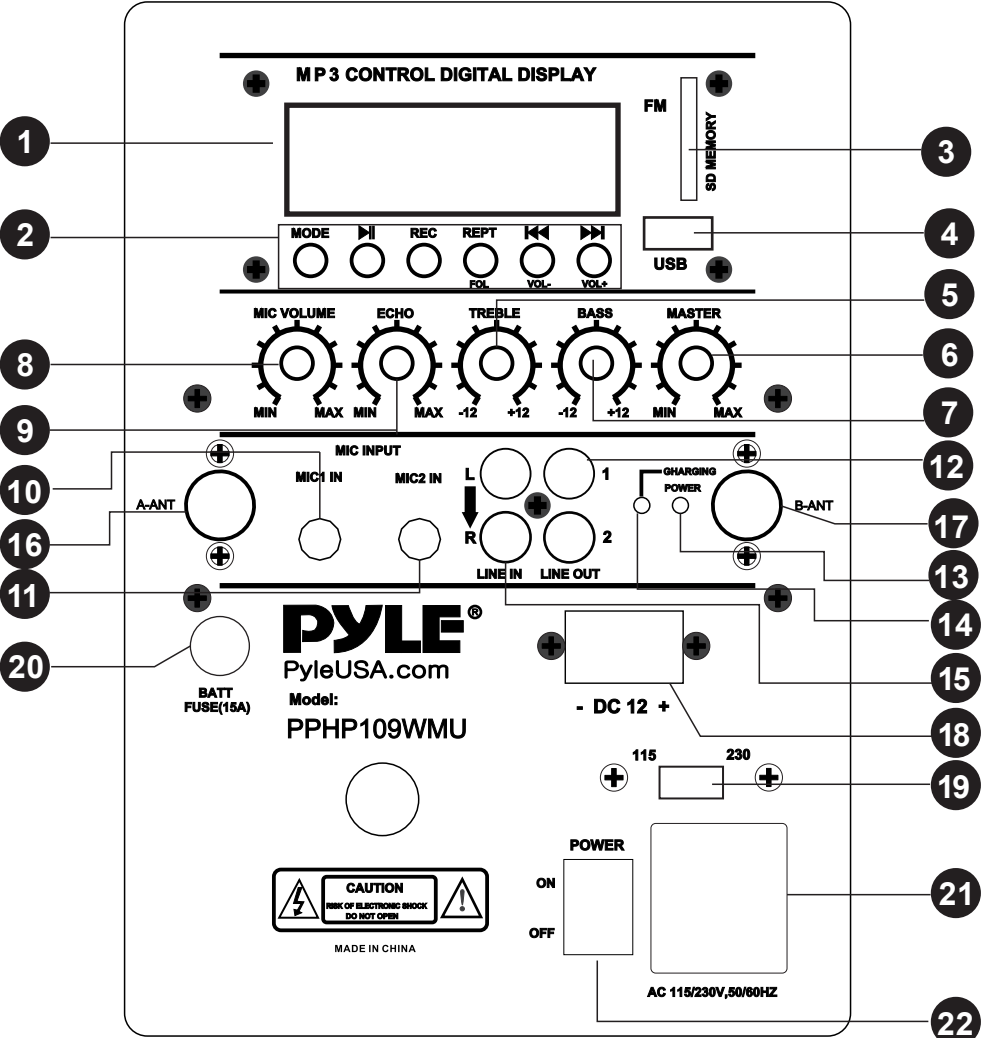

PPHP109WMU

Wireless & Portable BT PA Speaker

Active-Powered Loudspeaker System, Built-in Rechargeable Battery, USB/SD Readers, Includes Handheld Microphone, Recording Ability, FM Radio (1000 Watt, 10" Subwoofer)

Features:

- Versatile High-Powered Mobile Cabinet Speaker System
- Rugged, Durable, and Reliable Sound
- Wireless BT Music Streaming Ability
- Speaker System: 10" Woofer, 1.34" Tweeter
- Compression Driver with Titanium Diaphragm
- Built-in Rechargeable Battery
- 2-Way Full Range Audio Projection
- Built-in Digital Audio Amplifier
- RCA (L/R) Stereo Line Input Connectors
- RCA (L/R) Stereo Line Output Connectors
- Connect & Stream Audio from External Devices
- USB Flash Drive & SD Memory Card Readers
- USB Reader Doubles as Device Charging Port
- FM Radio with Digital LCD Display
- ID3 Tag Song Readout Info: LCD Displays Song Title/Song Artist
- Rear Panel Rotary Dial & Button Control Center
- Master Volume, Mic Volume, Echo, Treble, Bass Setting
- (2) 1/4" Microphone Inputs
- Convenient Carry Handles
- 35mm Speaker Stand Mount
- Engineered Heavy Duty ABS Housing

MP3 Audio Recording Ability:

- It's Easy: One Button Record Activation
- Record Audio as Streamed through the Speaker System
- Ability to Record Vocals via Microphone
- Can Also Record Audio via Line & Aux Inputs
- Records to USB Flash & SD Memory Card
- Easy Transfer to PC & Mac

Wireless BT Streaming:

- Simple & Hassle-Free Pairing
- Works with All of Today's Latest Wireless BT Devices (Smartphones, Tablets, Laptops, Computers, etc.)
- Wireless BT Version: 5.0
- Wireless BT Network Name: 'Pyle Audio'
- Wireless Range: 100'+ ft.

What's in the Box:

- PA Speaker
- Wireless Handheld Microphone
- Headset Microphone
- Beltpack Transmitter
- Power Cable
- Remote control

Technical Specs:

- Power Output: 1000 Watt MAX
- Amplifier Class: AB
- Impedance: 4 Ohm
- T.H.D.: <1%
- Sensitivity: 95dB (+/-2dB)
- Mic Input Level: <15mV
- Line Input/output Level: >250mV
- Frequency Response: 100-18kHz
- Digital Audio File Compatibility: MP3, WMA
- Maximum SD/USB Flash Memory Support: 32GB
- Battery Operated Mic / Beltpack, Requires (4) x '5A', -Each (Included)
- Power Supply: 110/220V
- Dimensions (L x W x H): 10.2" x 12.5" x 19.3" –inches

Questions? Issues?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com



WARNING:

This product can expose you to a chemical or group of chemicals, which may include "**Nickel Carbonate**" which is known in the state of California to cause cancer, birth defects, or other reproductive harm. For more info, go to <https://www.p65warnings.ca.gov/>.

PYLE

PyleUSA.com



VISIT US ONLINE:

Have a question?

Need service or repair?

Want to leave a comment?

PyleUSA.com/ContactUs

PYLE