



USER'S MANUAL



www.pyleaudio.com




USER'S MANUAL



- PPHP84
- PPHP86A
- PPHP124
- PPHP126A
- PPHP127AI
- PPHP104
- PPHP106A
- PPHP154
- PPHP156A
- PPHP157AI

www.pyleaudio.com

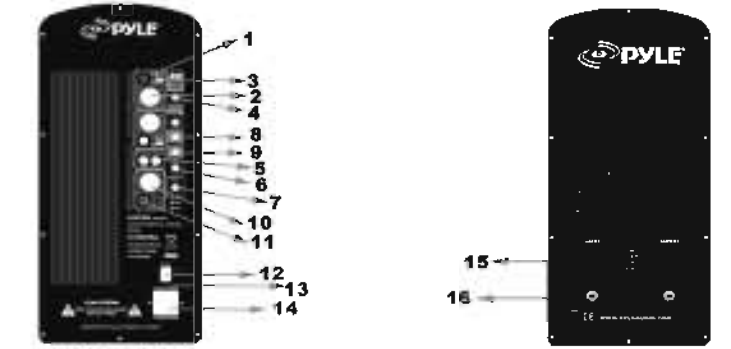

- 1) **Microphone Input**  
Allows you to connect a microphone with a 6.3mm connector is used microphone input and Line input
- 2) **Balanced Microphone Input**  
Connector for a balance microphone input and line input
- 3) **Mic/Line Input button**  
Keep this button up, the single will be in, keep this button down, the MIC will be in
- 4) **Microphone Control**  
Use this control to set the volume level of the microphone (6.3mm or balanced)
- 5) **RCS Line-in**  
Allows you to connect an external audio device (CD, radio/DVD, etc) with RCA connectors
- 6) **Line-in signal volume control**  
Use this control to set the volume level of the Line-in signal
- 7) **Volume Control**  
Set the volume level
- 8) **Treble**  
Use it to set the treble level
- 9) **Bass**  
Use it to set the bass level
- 10) **Signal output**  
Use this jack to connect another amplifier or even another powered speaker cabinet in cascade using a cannon connector
- 11) **Signal output**  
Use this jack to connect another amplifier or even another powered speaker cabinet in cascade using a cannon connector
- 12) **On/Off Power Switch**  
Press to power on/off the speaker box
- 13) **AC 115V/230V Voltage Selectable**
- 14) **AC power**  
To connect the AC power cord
- 15) **Speakon Input/Output**  
This Speakon can used for line level Input. Also it can offer signal to another passive speaker
- 16) **1/4" Jack Input/Output**  
This Jack can used for line level Input. Also it can offer signal to another passive speaker

Pyle Audio-www.pyleaudio.com-Instruction Manual Page 5

FEATURES:

PPHP127AI  
12" 1200 Watt Powered  
2 Way Full Range PA Speaker w/Built-in iPod Dock

- 12" Subwoofer
- Power Switch and Digital Amplifier
- Built-in iPod Docking Station
- 1.34" Titanium Compression Driver
- XLR and 1/4" Mic Inputs
- XLR Stereo RCA Line Input
- XLR and 1/4" Line Outputs
- Volume, Bass Treble Controls
- 2-Way, 2-Speaker Professional speaker
- High Efficiency Mid-Low Woofer
- 35mm Titanium Dome Horn Driver
- PTC Driver Protect
- Power Output: 800 Watts RMS
- Impedance: 8 Ohm ±20%
- Sensitivity: 101±3dB
- Frequency Response: 50Hz-20 KHz (-3dB)
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover Frequency: 3.5K Hz
- 35mm Speaker Stand Mount

PPHP157AI:  
15" 1400 Watt Portable Powered  
2 Way Full Range PA Speaker w/Built-in iPod Dock

- 15" Subwoofer
- Built-in iPod Dock
- Power Switch and Digital Amplifier
- 1.75" Titanium Compression Driver
- XLR and 1/4" Mic Inputs
- XLR Stereo RCA Line Input
- XLR and 1/4" Line Outputs
- Master Volume, Bass Treble Controls
- 2-Way, 2-Speaker Professional speaker
- High Efficiency Mid-Low Woofer
- 35mm Titanium Dome Horn Driver
- PTC Driver Protect
- Power Output: 700 Watts RMS
- Impedance: 8 Ohm ±20%
- Sensitivity: 101±3dB
- Frequency Response: 40Hz-22 KHz (-3dB)
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover Frequency: 3.5K Hz
- 35mm Speaker Stand Mount

Before using your new Speaker System Please review the following instructions, for the safety and investment.

INSTRUCTIONS

Before connecting the speaker, make sure the system is off and the controls on the minimum level. On the contrary the system could damage

- 1.- Plug the power cable to the AC outlet and to the system and to the speaker
- 2.- Plug the Microphone in the "MIC" Input
- 3.- Connect (CD, DECK, MP3, DVD, etc) on "LINE IN" Input
- 4.- Turn on the systems. A green LED will light up to indicate the speaker is on
- 5.- Set the volume on the low level on the MIC and LINE IN Input
- 6.- Increase the master volume (place on the right side of LINE OUT \* connector)
- 7.- Set TREBLE and BASS controls to equalize the sound
- 8.- A red LED will light up when the system detects overload power.

You will must decrease the volume.

CAUTIONS

Do not place the microphone against the speaker, it can cause feedback echo and it will damage the system.

EXTRA FUNCITONS

6.3 and canon connectors marked as LINE OUT can handle an amplifier or even another powered speaker cabinet, in cascade. On the bottom of the speaker there is a hole to place a stand.

	PPHP127AI	PPHP157AI
Model	PPHP127AI	PPHP157AI
Power	1200W	1400W
Frequency	50Hz-20KHz	40Hz-22KHz
Impedance	8 Ohm	8 Ohm
Sensitivity	101±3dB	101±3dB
Dimensions	480x300x110mm	570x300x110mm
Weight	11kg	13kg
Color	Black	Black
Material	Plastic	Plastic
Warranty	1 Year	1 Year
Power	1200W	1400W

FEATURES:

PPHP84  
400 Watts 8" 2 Way Plastic PA Speaker

- 8" Woofer
- 1.5" Titanium Compression Driver
- Dual 1/4 And Speakon Jacks Input
- 2-Way Ported Enclosure For Extra Bass Responce
- Ptc Driver Protect
- Power Max:400Watts
- Power Rms:200Watts
- Impedance:8OHM±20%
- Sensitivity:96±3DB
- Frequency Responce :45HZ-20KHZ
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover Frequency: 3.0KHZ
- 35MM Speaker Stand Mount

PPHP86A:  
400 Watts 8" Powered 2 Way PA Speaker

- 8" Woofer
- 1.5" Titanium Compression Driver
- Xlr Mic Input
- Xlr&Stereo Rca Line Input
- Xlr Line Output
- Master Volume,Bass&Treble Control
- Frequency Response:45HZ-20KHZ
- Power Output:200Watts Rms,400Watts Peak
- Crossover Frequency:3.0KHZ
- 35MM Speaker Stand Mount

PPHP104:  
600 Watts 10" 2 Way Plastic PA Speaker

- 10" Woofer
- 2" Titanium Compression Driver
- Dual 1/4 And Speakon Jacks Input
- 2-Way Ported Enclosure For Extra Bass Responce
- Ptc Driver Protect
- Power Max:600Watts
- Power Rms:300Watts
- Impedance:8OHM±20%
- Sensitivity:96±3DB
- Frequency Responce :45HZ-20KHZ
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover frequency : 3.0KHZ
- 35MM Speaker Stand Mount

PPHP106A:  
600 Watts 10" Powered 2 Way PA Speaker

- 10" Woofer
- 2" Titanium Compression Driver
- Xlr Mic Input
- Xlr&Stereo Rca Line Input
- Xlr Line Output
- Master Volume,Bass&Treble Control
- Frequency Response:45HZ-20KHZ
- Power Output:300Watts Rms,600Watts Peak
- Crossover Frequency:3.0KHZ
- 35MM Speaker Stand Mount

FEATURES:

PPHP124:  
1000 Watts 12" 2 Way Plastic PA Speaker

- 12" Woofer
- 2.5" Titanium Compression Driver
- Dual 1/4 And Speakon Jacks Input
- Ptc Driver Protect
- Power Max:1000Watts
- Power Rms:500Watts
- Impedance:8OHM±20%
- Sensitivity:96±3DB
- Frequency Responce :45HZ-5KHZ
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover frequency: 3.0KHZ
- 35MM Speaker Stand Mount

PPHP126A:  
1000 Watts 12" Powered 2 Way PA Speaker

- 12" Woofer
- 2.5" Titanium Compression Driver
- Xlr Mic Input
- Xlr&Stereo Rca Line Input
- Xlr Line Output
- Master Volume,Bass&Treble Control
- Frequency Response:45HZ-5KHZ
- Power Output:500Watts Rms,1000Watts Peak
- Crossover Frequency:3.0KHZ
- 35MM Speaker Stand Mount

PPHP154:  
1200 Watts 15" 2 Way Plastic PA Speaker

- 15" Woofer
- 3" Titanium Compression Driver
- Dual 1/4 And Speakon Jacks Input
- 2-Way Ported Enclosure For Extra Bass Responce
- Ptc Driver Protect
- Power Max:1200Watts
- Power Rms:600Watts
- Impedance:8OHM±20%
- Sensitivity:97±3DB
- Frequency Responce :30HZ-3.5KHZ
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover frequency : 3.0KHZ
- 35MM Speaker Stand Mount

PPHP156A:  
1200Watts 15" Powered 2 Way PA Speaker

- 15" Woofer
- 3" Titanium Compression Driver
- Xlr Mic Input
- Xlr&Stereo Rca Line Input
- Xlr Line Output
- Master Volume,Bass&Treble Control
- Frequency Response:30HZ-3.5KHZ
- Power Output:300Watts Rms,1200Watts Peak
- Crossover Frequency:3.0KHZ
- 35MM Speaker Stand Mount

	PPHP84	PPHP86A	PPHP104	PPHP106A
Model	PPHP84	PPHP86A	PPHP104	PPHP106A
Power	400W	400W	600W	600W
Frequency	45Hz-20KHz	45Hz-20KHz	45Hz-20KHz	45Hz-20KHz
Impedance	8 Ohm	8 Ohm	8 Ohm	8 Ohm
Sensitivity	96±3dB	96±3dB	96±3dB	96±3dB
Dimensions	480x300x110mm	480x300x110mm	570x300x110mm	570x300x110mm
Weight	11kg	11kg	13kg	13kg
Color	Black	Black	Black	Black
Material	Plastic	Plastic	Plastic	Plastic
Warranty	1 Year	1 Year	1 Year	1 Year
Power	400W	400W	600W	600W