



USER'S MANUAL



www.pyleaudio.com




USER'S MANUAL



- PPHP84
- PPHP86A
- PPHP124
- PPHP126A
- PPHP128AI
- PPHP104
- PPHP106A
- PPHP154
- PPHP156A
- PPHP158AI

www.pyleaudio.com

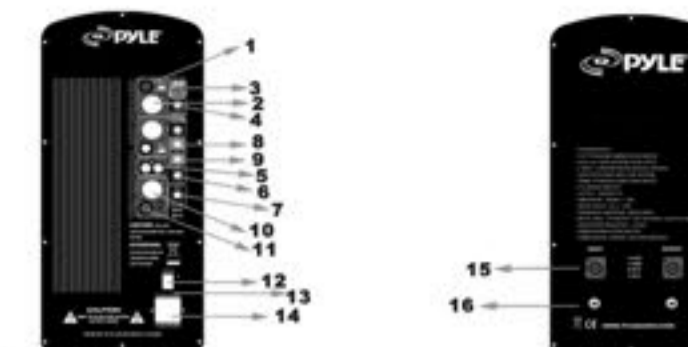

- 1) Microphone Input**  
Allows you to connect a microphone with a 6.3mm connector is used microphone input and Line input
- 2) Balanced Microphone Input!**  
Connector for a balance microphone input and line input
- 3) Mic/Line Input button**  
Keep this button up, the single will be in, keep this button down, the MIC will be in
- 4) Microphone Control**  
Use this control to set the volume level of the microphone (6.3mm or balanced)
- 5) RCS Line-in**  
Allows you to connect an external audio device (CD, radio/DVD, etc) with RCA connectors
- 6) Line-in signal volume control**  
Use this control to set the volume level of the Line-in signal
- 7) Volume Control**  
Set the volume level
- 8) Treble**  
Use it to set the treble level
- 9) Bass**  
Use it to set the bass level
- 10) Signal output**  
Use this jack to connect another amplifier or ever another powered speaker cabinet in cascade using a cannon connector
- 11) Signal output**  
Use this jack to connect another amplifier or ever another powered speaker cabinet in cascade using a cannon connector
- 12) On/Off Power Switch**  
Press to power on/off the speaker box
- 13) AC 115V/230V Voltage Selectable**
- 14) AC power**  
To connect the AC power cord
- 15) Speakon Input/Output**  
This Speakon can used for line level Input. Also it can offer signal to another passive speaker
- 16) 1/4" Jack Input/Output**  
This Jack can used for line level Input. Also it can offer signal to another passive speaker

Pyle Audio-www.pyleaudio.com-Instruction Manual Page 5

FEATURES:

- PPHP128AI**  
12" 1200 Watt Powered  
2 Way Full Range PA Speaker w/Built-in iPod Dock
- 12" Subwoofer
- Power Switch and Digital Amplifier
- Built-in iPod Docking Station
- 1.34" Titanium Compression Driver
- XLR and 1/4" Mic Inputs
- XLR Stereo RCA Line Input
- XLR and 1/4" Line Outputs
- Volume, Bass Treble Controls
- 2-Way, 2-Speaker Professional speaker
- High Efficiency Mid-Low Woofer
- 35mm Titanium Dome Horn Driver
- PTC Driver Protect
- Power Output: 600 Watts RMS
- Impedance: 8 Ohm ±20%
- Sensitivity: 101±3dB
- Frequency Response: 50Hz-20 KHz (-3dB)
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover Frequency: 3.5K Hz
- 35mm Speaker Stand Mount

- PPHP158AI**  
15" 1400 Watt Portable Powered  
2 Way Full Range PA Speaker w/Built-in iPod Dock
- 15" Subwoofer
- Built-in iPod Dock
- Power Switch and Digital Amplifier
- 1.75" Titanium Compression Driver
- XLR and 1/4" Mic Inputs
- XLR Stereo RCA Line Input
- XLR and 1/4" Line Outputs
- Master Volume, Bass Treble Controls
- 2-Way, 2-Speaker Professional speaker
- High Efficiency Mid-Low Woofer
- 35mm Titanium Dome Horn Driver
- PTC Driver Protect
- Power Output: 700 Watts RMS
- Impedance: 8 Ohm ±20%
- Sensitivity: 101±3dB
- Frequency Response: 40Hz-22 KHz (-3dB)
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover Frequency: 3.5K Hz
- 35mm Speaker Stand Mount

Before using your new Speaker System Please review the following instructions, for the safety and investment.

INSTRUCTIONS

Before connecting the speaker, make sure the system is off and the controls on the minimum level. On the contrary the system could damage

1. -Plug the power cable to the AC outlet and to the system and to the speaker
2. -Plug the Microphone in the "MIC" input
3. -Connect (CD, DECK, MP3, DVD, etc) on "LINE IN" input
4. -Turn on the systems. A green LED will light up to indicate the speaker is on
5. -Set the volume on the low level on the MIC and LINE IN input
6. -Increase the master volume (place on the right side of LINE OUT \* connector)
7. Set TREBLE and BASS controls to equalize the sound
8. -A red LED will light up when the system detects overload power.

You will must decrease the volume.

CAUTIONS

Do not place the microphone against the speaker, it can cause feedback echo and it will damage the system.

EXTRA FUNCITONS

6.3 and canon connectors marked as LINE OUT can handle an amplifier or even another powered speaker cabinet, in cascade. On the bottom of the speaker there is a hole to place a stand.

	PPHP128AI	PPHP158AI		
WOOFER	12"	15"		
Compression Driver	1.34"	1.75"		
Impedance	8 Ohm	8 Ohm		
Frequency	50 Hz - 20 KHz	40 Hz - 22 KHz		
Power Max	600 Watts	700 Watts		
Power Rms	300 Watts	350 Watts		
Impedance	8 Ohm	8 Ohm		
Sensitivity	101±3dB	101±3dB		
Frequency Response	50Hz-20KHz	40Hz-22KHz		
Crossover	3.5K Hz	3.5K Hz		
Stand Mount	Yes	Yes		
Weight	12.5kg	14.5kg		
Power/Max	1200W	1400W		

FEATURES:

- PPHP84**  
400 Watts 8" 2 Way Plastic PA Speaker
- 8"Woofer
- 1.5" Titanium Compression Driver
- Dual 1/4 And Speakon Jacks Input
- 2-Way Ported Enclosure For Extra Bass Responce
- Ptc Driver Protect
- Power Max:400Watts
- Power Rms:200Watts
- Impedance:8OHM±20%
- Sensitivity:95±1-3DB
- Frequency Responce :45HZ-20KHZ
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover frequency : 3.0KHZ
- 35MM Speaker Stand Mount

- PPHP86A**  
400 Watts 8" Powered 2 Way PA Speaker
- 8"Woofer
- 1.5" Titanium Compression Driver
- Xlr Mic Input
- Xlr&Stereo Rca Line Input
- Xlr Line Output
- Master Volume,Bass&Treble Control
- Frequency Response:45HZ-20KHZ
- Power Output:200Watts Rms,400Watts Peak
- Crossover Frequency:3.0KHZ
- 35MM Speaker Stand Mount

- PPHP104**  
600 Watts 10" 2 Way Plastic PA Speaker
- 10"Woofer
- 2" Titanium Compression Driver
- Dual 1/4 And Speakon Jacks Input
- 2-Way Ported Enclosure For Extra Bass Responce
- Ptc Driver Protect
- Power Max:600Watts
- Power Rms:300Watts
- Impedance:8OHM±i-20%
- Sensitivity:96±1-3DB
- Frequency Responce :45HZ-20KHZ
- Metal Grill To Protect The Woofer/Plastic Cabinet
- rossover frequency : 3.0KHZ
- 35MM Speaker Stand Mount

- PPHP106A**  
600 Watts 10" Powered 2 Way PA Speaker
- 10"Woofer
- 2" Titanium Compression Driver
- Xlr Mic Input
- Xlr&Stereo Rca Line Input
- Xlr Line Output
- Master Volume,Bass&Treble Control
- Frequency Response:45HZ-20KHZ
- Power Output:300Watts Rms,600Watts Peak
- Crossover Frequency:3.0KHZ
- 35MM Speaker Stand Mount

	PPHP84	PPHP86A	PPHP104	PPHP106A
WOOFER	8"	8"	10"	10"
Compression Driver	1.5"	1.5"	2"	2"
Impedance	8 Ohm	8 Ohm	8 Ohm	8 Ohm
Frequency	45 Hz - 20 KHz	45 Hz - 20 KHz	45 Hz - 20 KHz	45 Hz - 20 KHz
Power Max	400 Watts	400 Watts	600 Watts	600 Watts
Power Rms	200 Watts	200 Watts	300 Watts	300 Watts
Impedance	8 Ohm	8 Ohm	8 Ohm	8 Ohm
Sensitivity	95±1-3DB	95±1-3DB	96±1-3DB	96±1-3DB
Frequency Response	45Hz-20KHz	45Hz-20KHz	45Hz-20KHz	45Hz-20KHz
Crossover	3.0K Hz	3.0K Hz	3.0K Hz	3.0K Hz
Stand Mount	Yes	Yes	Yes	Yes
Weight	8kg	8kg	10kg	10kg
Power/Max	400W	400W	600W	600W

FEATURES:

- PPHP124**  
1000 Watts 12" 2 Way Plastic PA Speaker
- 12"Woofer
- 2.5" Titanium Compression Driver
- Dual 1/4 And Speakon Jacks Input
- Ptc Driver Protect
- Power Max:1000Watts
- Power Rms:500Watts
- Impedance:8OHM±i-20%
- Sensitivity:95±1-3DB
- Frequency Responce :45HZ-5KHZ
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover frequency : 3.0KHZ
- 35MM Speaker Stand Mount

- PPHP126A**  
1000 Watts 12" Powered 2 Way PA Speaker
- 12"Woofer
- 2.5" Titanium Compression Driver
- Xlr Mic Input
- Xlr&Stereo Rca Line Input
- Xlr Line Output
- Master Volume,Bass&Treble Control
- Frequency Response:45HZ-5KHZ
- Power Output:500Watts Rms,1000Watts Peak
- Crossover Frequency:3.0KHZ
- 35MM Speaker Stand Mount

- PPHP154**  
1200 Watts 15" 2 Way Plastic PA Speaker
- 15"Woofer
- 3" Titanium Compression Driver
- Dual 1/4 And Speakon Jacks Input
- 2-Way Ported Enclosure For Extra Bass Responce
- Ptc Driver Protect
- Power Max:1200Watts
- Power Rms:600Watts
- Impedance:8OHM±i-20%
- Sensitivity:97±1-3DB
- Frequency Responce :30HZ-3.5KHZ
- Metal Grill To Protect The Woofer/Plastic Cabinet
- Crossover frequency : 3.0KHZ
- 35MM Speaker Stand Mount

- PPHP156A**  
1200Watts 15" Powered 2 Way PA Speaker
- 15"Woofer
- 3" Titanium Compression Driver
- Xlr Mic Input
- Xlr&Stereo Rca Line Input
- Xlr Line Output
- Master Volume,Bass&Treble Control
- Frequency Response:30HZ-3.5KHZ
- Power Output:300Watts Rms,1200Watts Peak
- Crossover Frequency:3.0KHZ
- 35MM Speaker Stand Mount

	PPHP124	PPHP126A	PPHP154	PPHP156A
WOOFER	12"	12"	15"	15"
Compression Driver	2.5"	2.5"	3"	3"
Impedance	8 Ohm	8 Ohm	8 Ohm	8 Ohm
Frequency	45 Hz - 5 KHz	45 Hz - 5 KHz	30 Hz - 3.5 KHz	30 Hz - 3.5 KHz
Power Max	1000 Watts	1000 Watts	1200 Watts	1200 Watts
Power Rms	500 Watts	500 Watts	600 Watts	600 Watts
Impedance	8 Ohm	8 Ohm	8 Ohm	8 Ohm
Sensitivity	95±1-3DB	95±1-3DB	97±1-3DB	97±1-3DB
Frequency Response	45Hz-5KHz	45Hz-5KHz	30Hz-3.5KHz	30Hz-3.5KHz
Crossover	3.0K Hz	3.0K Hz	3.0K Hz	3.0K Hz
Stand Mount	Yes	Yes	Yes	Yes
Weight	12kg	12kg	15kg	15kg
Power/Max	1000W	1000W	1200W	1200W