


# PYLE

PyleUSA.com

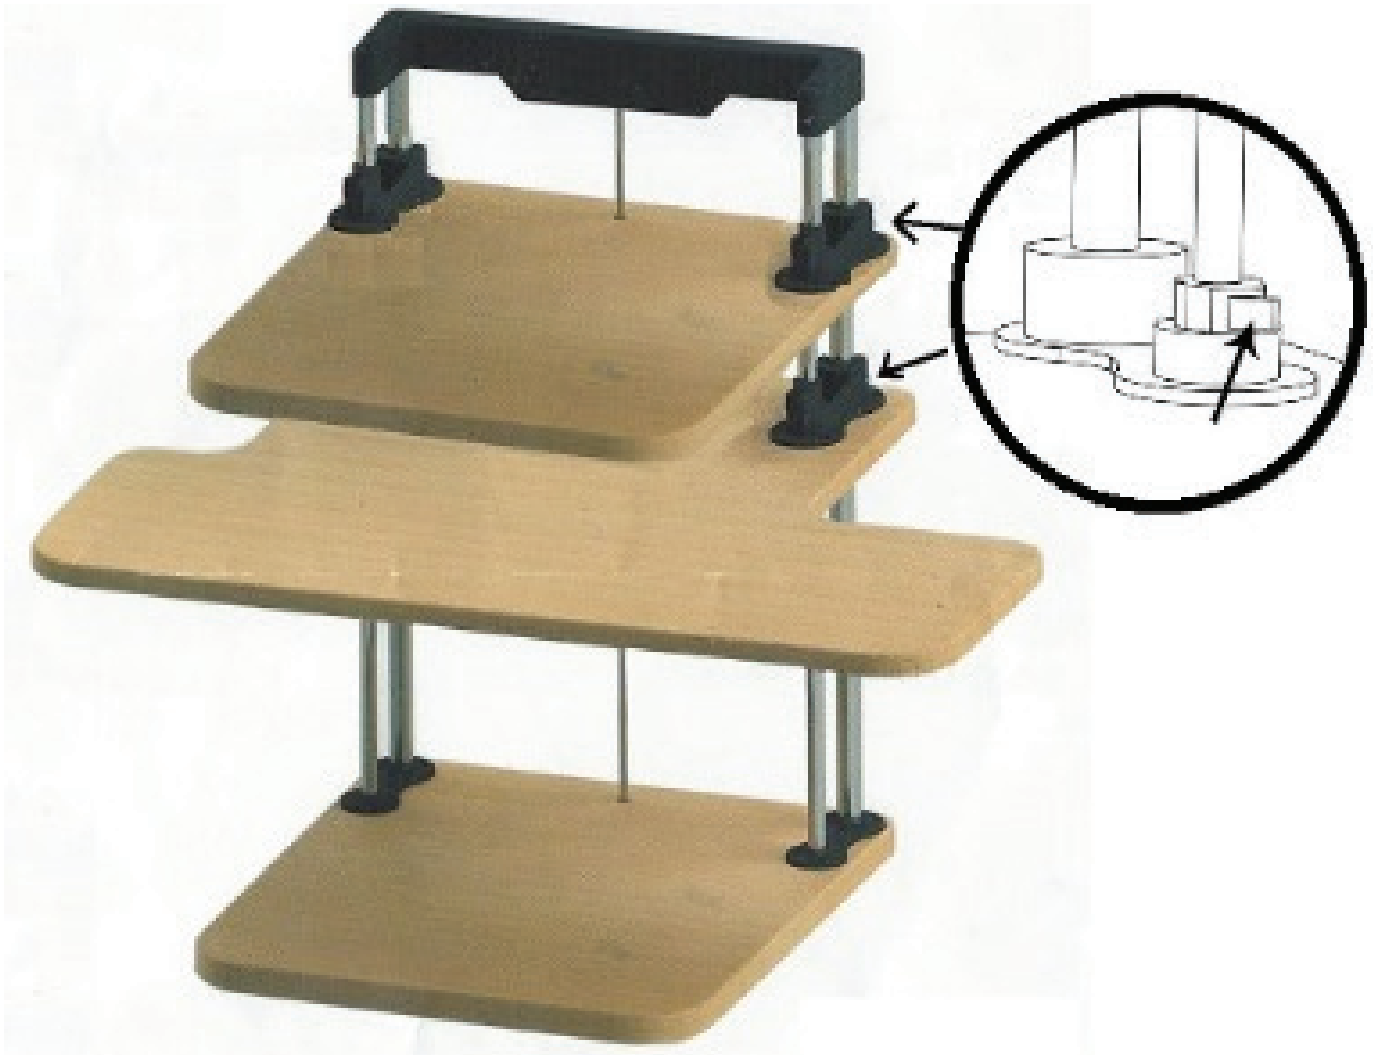

## **USER'S MANUAL**

---

## **SITTING / STANDING**

---

## **WORKSTATION DEVICE STAND**

PSTNDDSK38


## Components Included

- 1 Keyboard Level Panel
- 1 Monitor Level Panel
- 1 Base Panel
- 1 Rail Cap
- 1 Support Leg
- 1 Support Leg Extender    5 Rails (2 Thick, 2 Medium, 1 Thin)
- 8 Screws
- 1 Height Adjustment Bolt
- 2 Allen Keys
- 4 Non-skid sticker pads

## Directions


### 1. Insert the Rails:

Tip the base panel on its side and screw in the thick and medium rails one at a time. Add the non-skid pads to the bottom.

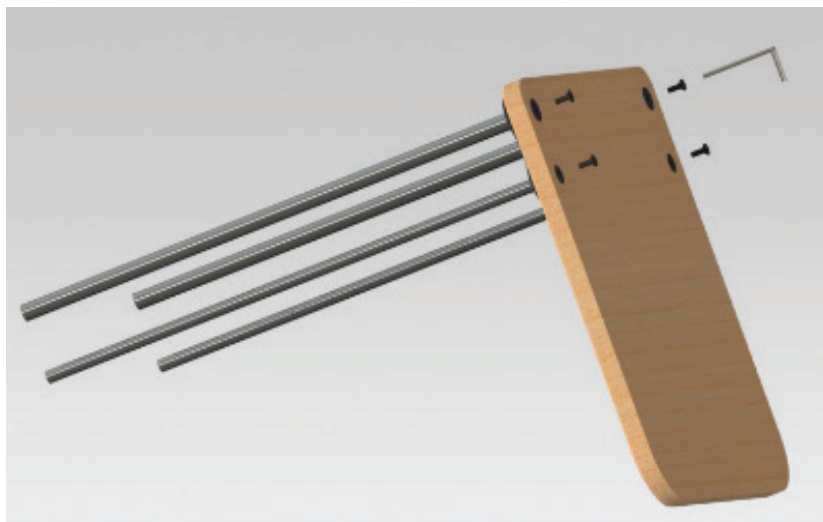


### 2. Add the Desktop Panels:

With the black clips facing up, slide the desktop panels onto the rails.

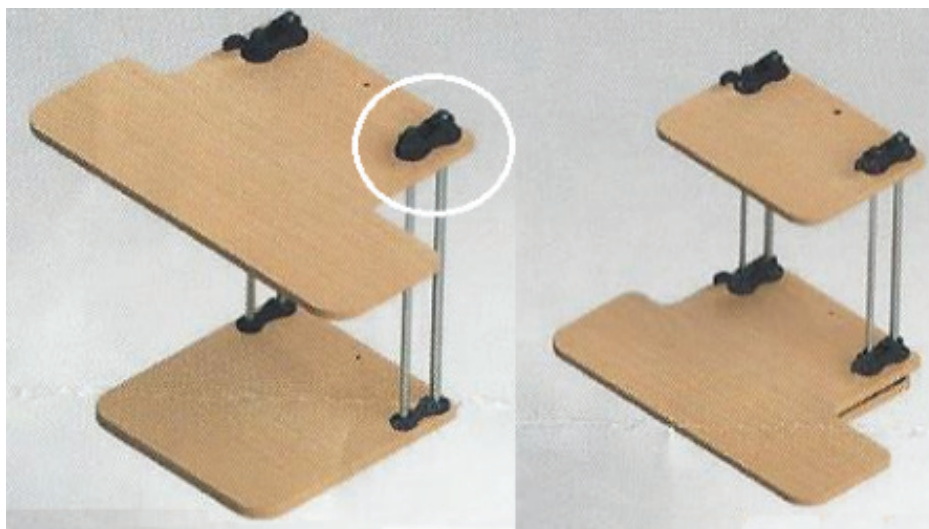

### 3. Add Thin Rail & Cap:


Lower panels. Add the thin rail, then push the rail cap onto the rails and screw cap on.

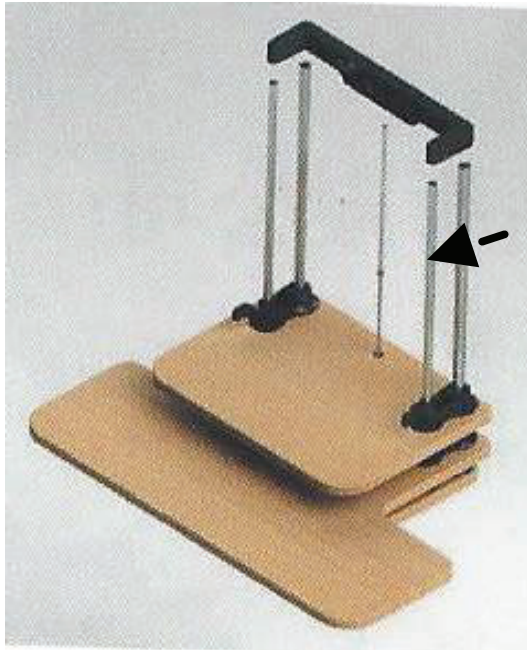

Height Adjustment Bolt


### 4. Adjust the Desk Height:

With both hands on the Monitor Level, slide it up to your comfortable working height. While still holding it, use your thumbs to lock the black clips.

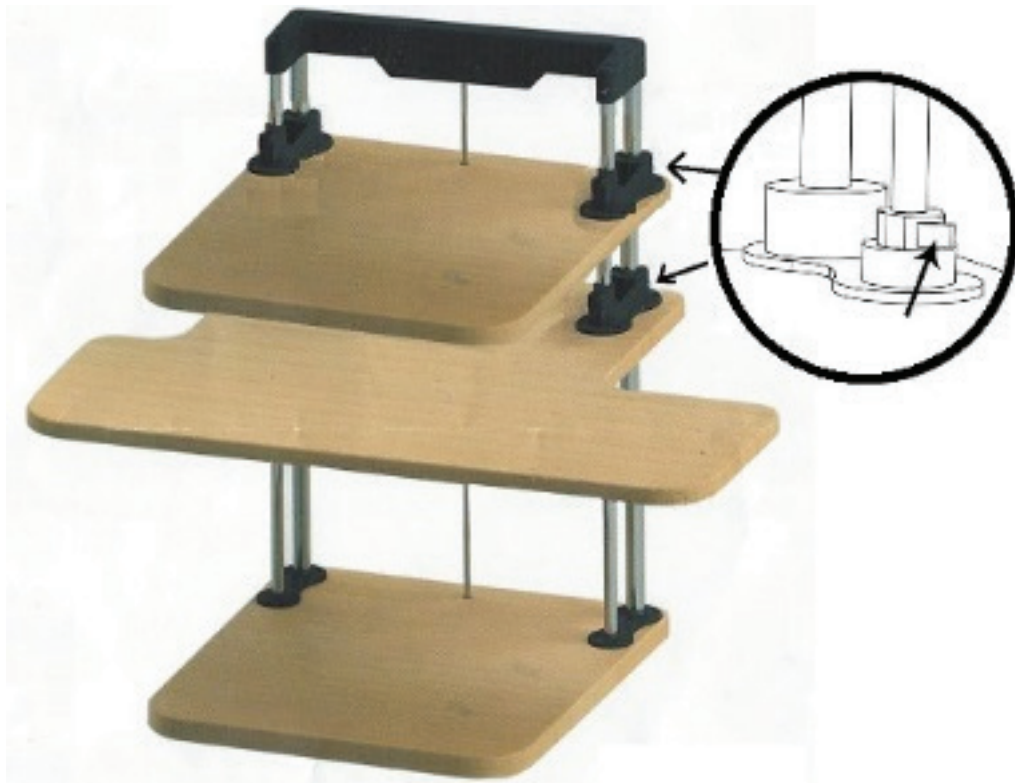




### 5. Adjust the Support Leg:

Set the Support Leg by loosening the black knob and sliding the metal tubes to your correct height. Tighten knob. Then insert Leg between the base level and keyboard level.

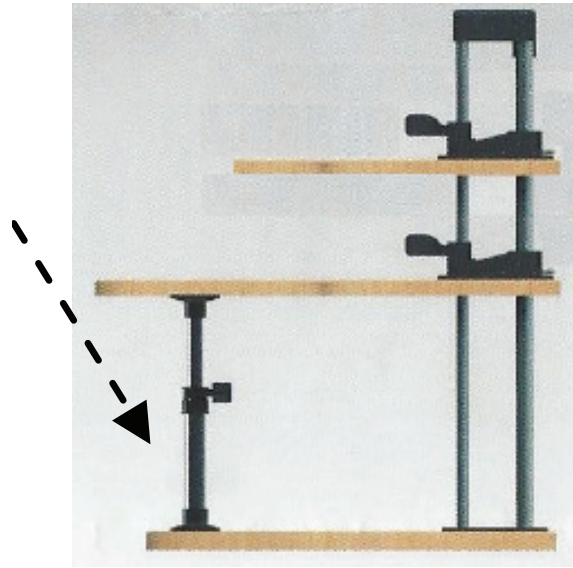

### 6. Optional - Extend the Support Leg:


Loosen the black knob and pull out the top tube. Switch it out for the longer extender leg. Put cap on and tighten the knob.

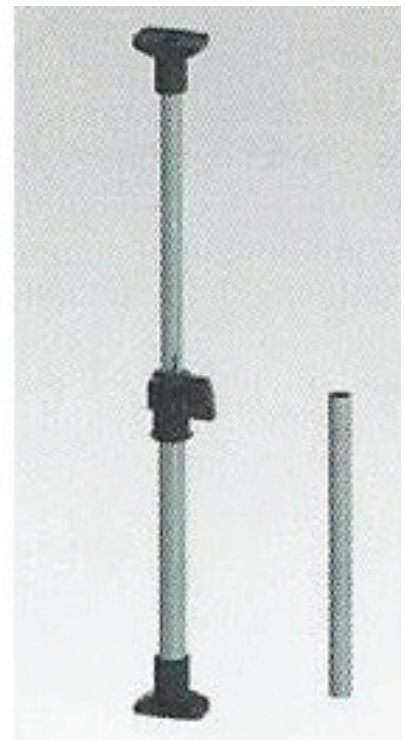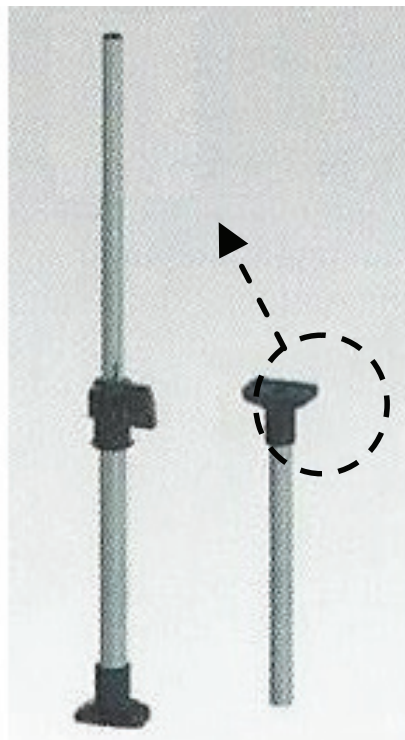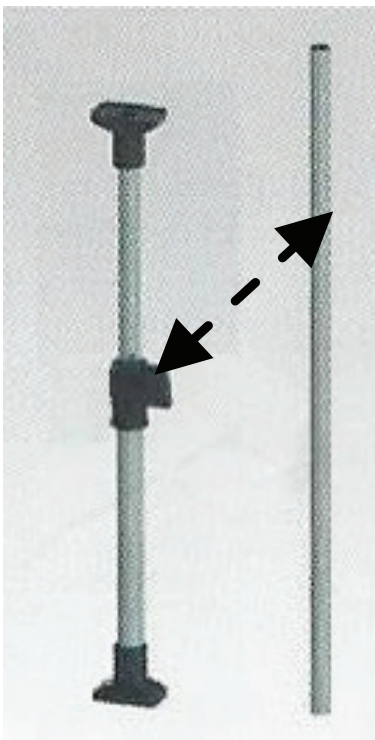




### 7. Mark your Keyboard Height:

Use the Allen Key to tighten the Height Adjustment Bolt to lock it at its current height. This allows you to quickly switch back to standing.

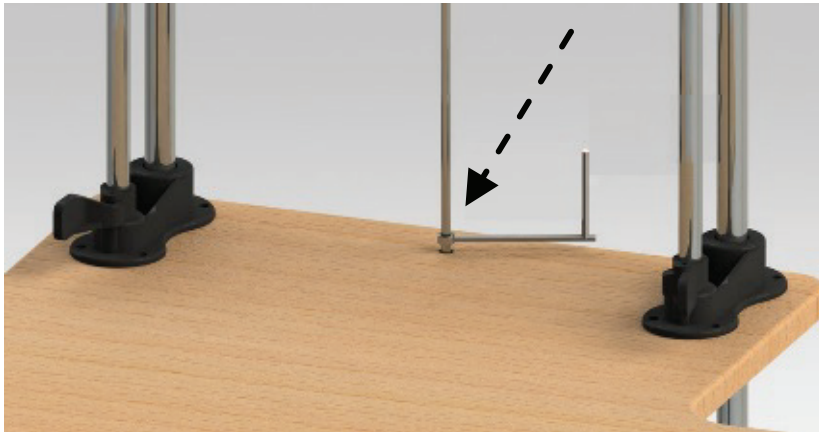


### 8. Keyboard tray:

Keyboard tray can be pulled forward for comfort and extra space.

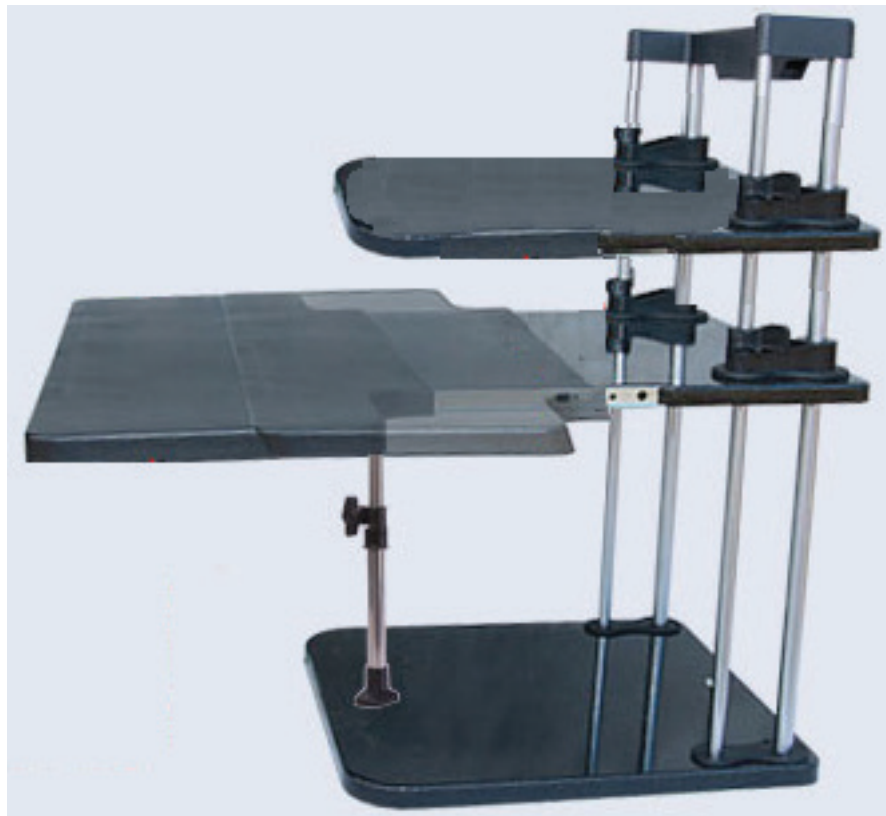

### 9. Lower the Desk:

Remove the support leg before lowering desk. Hold Keyboard Level with both hands, use thumbs to unlock the black clips. Then, slowly glide it down. Repeat for Monitor Level.

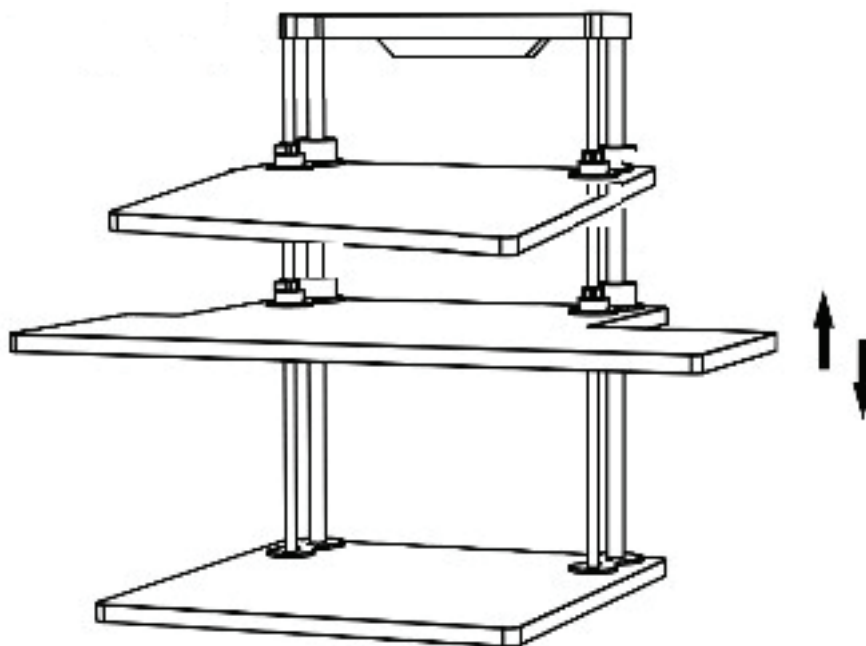

### Troubleshooting

Desktop slides down:

Make sure the clips are fully locked




Open



Locked

### Support Leg:

If the Support Leg does not hold, make sure you have fully tightened the knob on the leg.

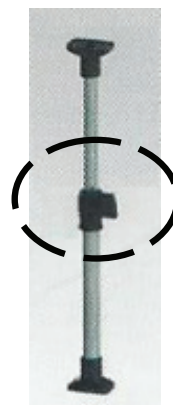

## SITTING / STANDING WORKSTATION DEVICE STAND FEATURES AND SPECIFICATIONS

### Features:

- Sitting / Standing Workstation Device Stand
- Easy Setup & Height Adjustable Platform Tray
- Device Tray Can be Set to Any Height Along the Support Frames
- Quick Lock & Release Mechanism
- Designed for Convenience & Easy Use
- Enjoy Smooth Transitions for Device Stability
- Rugged, Reliable & Ergonomic Design
- Used with Computers, Laptops, Monitors, TVs, Sound Equipment, etc.
- Perfect for the Home, Office or Studio
- Includes Optional Support Leg

### Technical Specs:

- Construction Material: Steel Alloy, Engineered MDF
- Upper Device Shelf Tray Size (W x D): 25.6" x 17.7"
- Lower Base Shelf Tray Size (W x D): 14.2" x 15.6"
- Max. Load Capacity: 25 lbs.
- Weight: 18.8 lbs.

**PYLE**

PyleUSA.com