

PWPBT47 with Bluetooth

In-Wall Audio Control - Bluetooth & NFC Wireless Receiver, Aux (3.5mm) Input, Wall Mount

USER MANUAL

In-Wall Audio Control - Bluetooth & NFC Wireless Receiver, Aux (3.5mm) Input, Wall Mount

Power on the Unit:

- 1.) The unit can be powered via the included DC 5V/1A power adapter - or hard-wired prior to in-wall installation via the 2-Pin screw terminal located on the back panel of the unit.
- 2.) Press and hold the 'PAIRING' button, located on the front panel, for 3-4 seconds to Power ON. The 'BT' (Bluetooth) LED indicator light will also activate.

Aux (3.5mm) Input Connection & Operation:

- 1.) Once the unit is powered on, any device connected to the wall plate's Aux (3.5mm) jack, via audio connection cable, will play automatically. As soon as the wall plate detects audio transmission via Aux Input, it will play -- overriding any Bluetooth or NFC connected audio signal transmission.

Bluetooth Pairing & Operation:

- 1.) Before attempting to pair / connect any Bluetooth device, ensure that you remove / disconnect any Aux (3.5mm) Input connection.
 - 2.) Once the unit is powered ON, press and hold the 'PAIRING' button for 2 seconds, until the Bluetooth LED indicator light begins to slowly blink.
 - 3.) Then, within your device's Bluetooth settings, select the Bluetooth Network Named: 'BT-RY', to pair / connect.
- Upon pairing, the Bluetooth LED Indicator light will blink progressively quicker until the unit successfully pairs with a compatible Bluetooth device.
 - When a successful Bluetooth connection is established, the Bluetooth LED indicator light will shine solid, indicating that the unit is ready to transmit audio.
 - Note: if a successful Bluetooth connection is not made within 90 seconds, the unit will cease attempts to establish a Bluetooth connection. To attempt re-connecting to a Bluetooth device again, press and hold the 'PAIRING' button for 1-2 seconds.

NFC Wireless Android Pairing & Operation:

- 1.) The unit features wireless audio streaming NFC (Near Field Communication) connectivity. NFC allows you to pair compatible Android devices by simply touching your device to the to the unit's front panel.

In-Wall Audio Control - Bluetooth & NFC Wireless Receiver, Aux (3.5mm) Input, Wall Mount

- Please ensure your device features, and is compatible with NFC connectivity.
- 2.) Powered on and then hold the "PAIRING" button 1-2 seconds to begin NFC connection. (Please make sure the both Bluetooth and NFC must be "ON".)
- When a successful NFC connection is established, the Bluetooth LED indicator light will shine solid, indicating that the unit is ready to transmit audio.

Bluetooth LED Indicator Status:

Pairing Mode: Blinking / Flashing LED Light (device is ready to pair)
Bluetooth / NFC Mode: Constant / Solid LED Light (device is successfully paired and ready to transmit audio)
Aux (3.5mm) Mode: LED Light OFF

Wall Plate Audio Receiver:


The Pyle Wall Plate Wireless Audio Receiver is a quick and easy way to get your music playing through a locally connected home theater or speaker system. The rear panel of the wall plate features a convenient screw terminal block for speakers, Aux (3.5mm) jack, along with the ability to 'hard-wire' a power supply -- as opposed to using the included power adapter. The wall plate allows convenient audio streaming options including Bluetooth, NFC (Near Field Communication), and Aux (3.5mm) input to connect even more external devices. Enjoy hassle-free audio transmission with the Pyle PWPBT47 Bluetooth & NFC Wireless Audio Control Receiver.

Universal Compatibility:

Pyle's Wall Plate Audio Receiver fits virtually all U.S. Electrical Gang Boxes. The universal standard wall plate size was designed to install conveniently in-wall, allowing and unlocking access to audio control like never before. A great choice for adding hassle-free audio control in homes, offices and businesses.

In-Wall Audio Control - Bluetooth & NFC Wireless Receiver, Aux (3.5mm) Input, Wall Mount


Function Instruction :

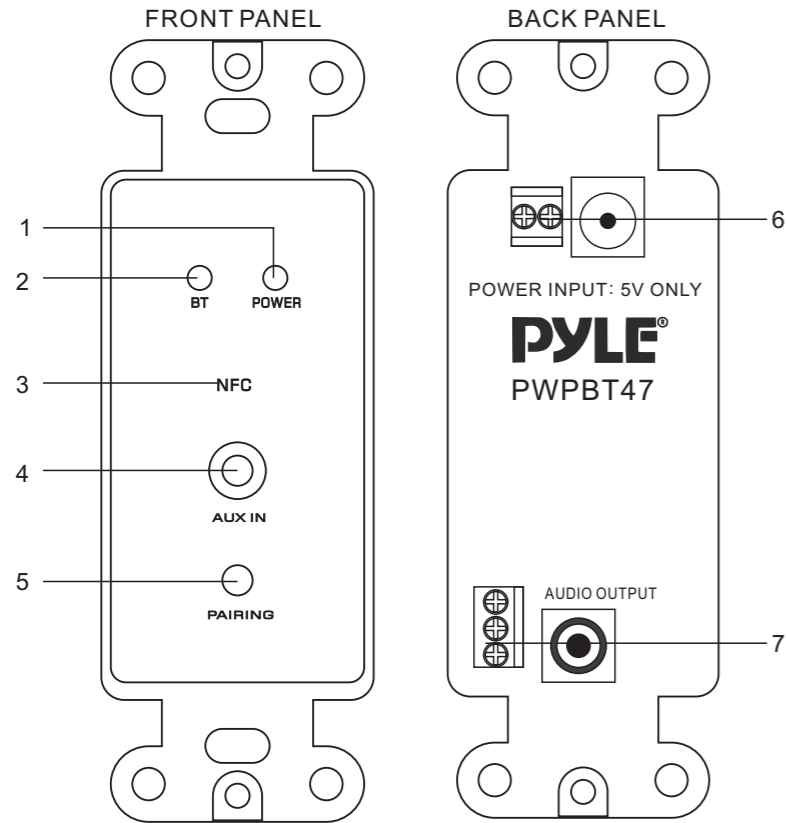

- 1) POWER LED
- 2) BT LED: BT/PAIRING LED
- 3) NFC: Near Field Communication
- 4) AUX IN: AUX 3.5 INPUT
- 5) PAIRING: Power ON/OFF or Pairing Button
- 6) Power Input (DC 5V/1A): Power Jack for Adapter/
2-PIN Screw Terminal
- 7) Audio Output: 3.5mm Stereo Audio Phone Jack/
3-PIN Screw Terminal for Connecting

In-Wall Audio Control - Bluetooth & NFC Wireless Receiver, Aux (3.5mm) Input, Wall Mount

Connection Diagram :

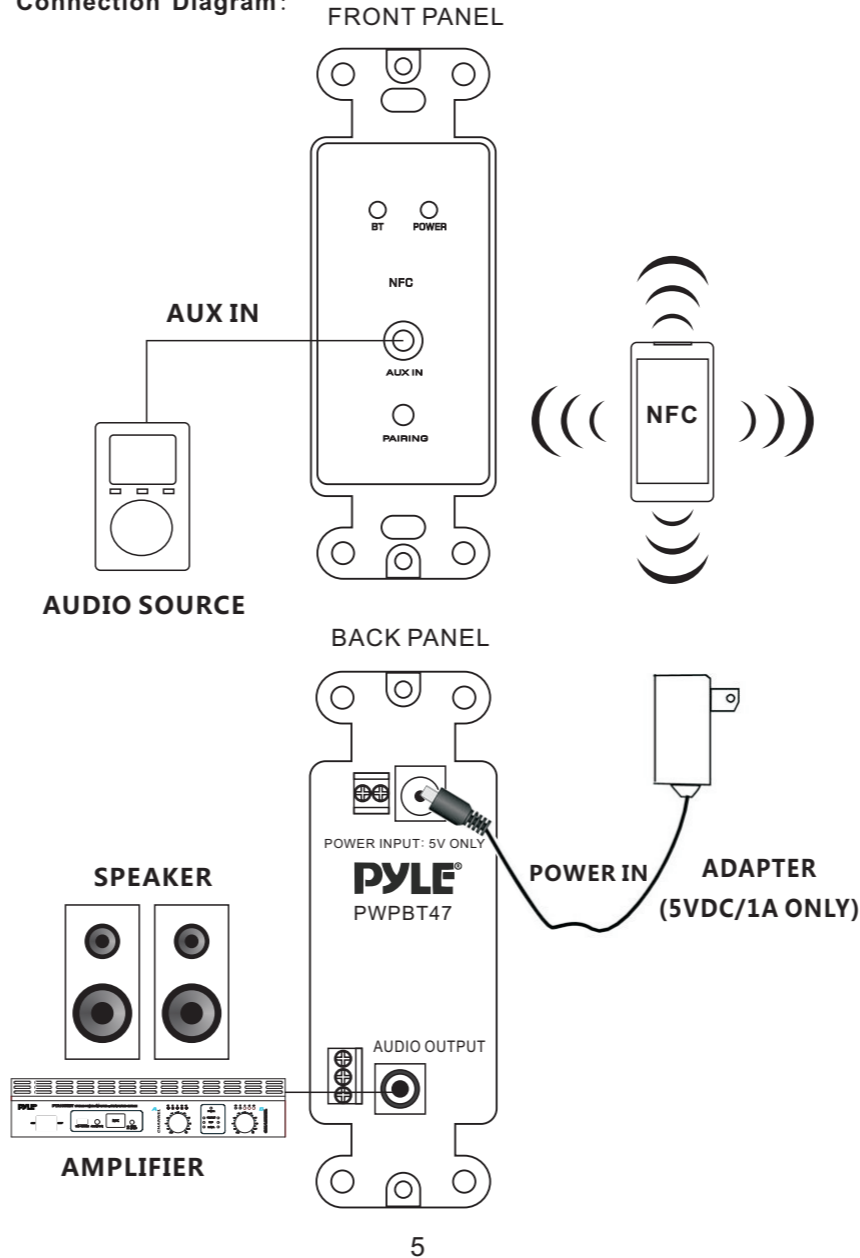

In-Wall Audio Control - Bluetooth & NFC Wireless Receiver, Aux (3.5mm) Input, Wall Mount

Features:

- In-Wall, Wall Plate Audio/Music Control
- Built-in Bluetooth for Wireless Audio Streaming
- NFC (Near Field Communication) Android Pairing
- Universal Standard Wall Plate Size
- Fits U.S. Electrical Gang Boxes
- Full Range Audio & Stereo Sound Transmission
- Front Panel Aux (3.5mm) Audio INPUT Jack
- Connect & Stream Audio from External Devices
- Rear Panel Aux (3.5mm) Audio OUTPUT Jack
- Transmit the Audio to Your Home Theater System
- Audio Output: 3-Pin Screw Terminals
- System can be Optionally 'Hard-Wire' Powered
- Includes DC Power Adaptor
- LED Connection Indicator Lights
- Perfect for the Home, Office or Business
- *Aux Input Must Be Disconnected to Allow Bluetooth/NFC Pairing

Bluetooth Connectivity:

- Easy & Hassle-Free Wireless Connection
- Compatible with All of Today's Latest Devices (Smartphones, Tablets, Laptops, Computers, etc.)
- Bluetooth Network Name: 'BT-RY'
- Bluetooth Version: 4.0
- Wireless Range: 30'+ ft.

What's in the Box:

- Audio Control Wall Plate Receiver
- Decorative Plate Frame Cover
- Wall Power Adapter

Technical Specs:

- Frequency Response: 40Hz-20kHz
- Input Sensitivity: 200mV/1V
- Power: 5V, DC/1A
- Dimensions (L x W x H): 4. 1" x 1. 38" x 1. 38"
- Unit Weight: 0. 069lb