

PLBAS82LE - PLBAS102LE - PLBAS122LE

Active Dual Bass Subwoofer Box System

Rear Vented Design
with Built-in Illuminating LED Lights


PYLE
PyleUSA.com

USER GUIDE

WIRING CONNECTION

Power amplifier for schematic diagram.

- Positive pole: Connect +12V and Rem. in parallel
- Negative pole: connect to GND

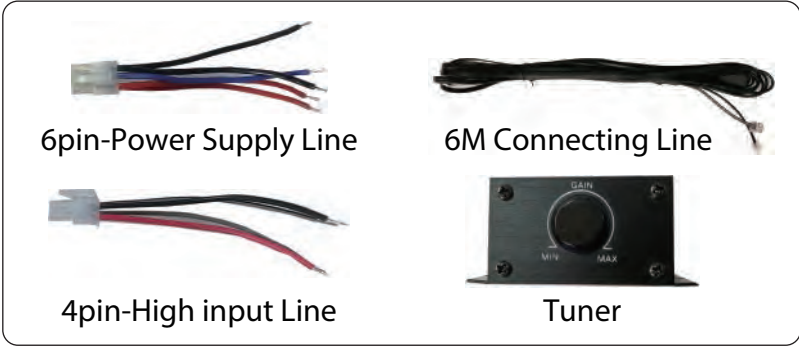

REMOTE CONTROL FEATURES

1. Turn ON/Standby: Press this key to turn on LEDs or switch to standby mode.

2/9. Dynamic Mode button: Switch from dynamic mode to color mode or switch between dynamic modes.


3/8. Dynamic Mode Speed button: Use these buttons to adjust dynamic mode speed. If the unit is in static mode, pressing these buttons will switch unit to dynamic mode.

4/5. Static Color Adjust button: Use this button to switch between static colors. Pressing these keys while in dynamic mode will switch the unit to static mode.

6/7. Brightness Adjust button: Pressing these buttons will adjust brightness while in static mode. If these buttons are pressed while unit is in dynamic mode, it will switch to static mode.

10. Demo Mode button: This button will switch the unit into demo mode.

While in demo mode, unit will loop through 9 of the dynamic modes with each repeating 3 times.

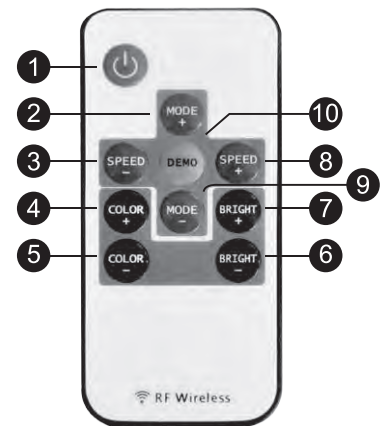

PLBAS82LE

8" Dual Bass Subwoofer Box System

Rear Vented Design with Built-in Illuminating LED Lights

Technical Specs:

- Construction Materials: 15mm Particle Board + Multilayer Board
- Power Rating: 2x400 Watts Max Power
- Voice Coil: 1.5"
- Impedance: 4 Ohms
- Magnet: 2x30 Oz
- Sensitivity: 90 dB
- Frequency Response: 40-1K Hz
- Remote Control Battery Operated, Requires (1) x 'CR2025' Batteries
- Battery Type: 3V Lithium Battery
- Battery Life: Up to 2+ Hours
- Product Dimensions (L x W x H): 25.9" x 9.0" x 10.6" -inches

PLBAS102LE

10" Dual Bass Subwoofer Box System

Rear Vented Design with Built-in Illuminating LED Lights

Technical Specs:

- Construction Materials: 15mm Particle Board + Multilayer Board
- Power Rating: 2x500 Watts Max Power
- Voice Coil: 2.0"
- Impedance: 4 Ohms
- Magnet: 2x40 Oz
- Sensitivity: 91 dB
- Frequency Response: 35-600 Hz
- Remote Control Battery Operated, Requires (1) x 'CR2025' Batteries
- Battery Type: 3V Lithium Battery
- Battery Life: Up to 2+ Hours
- Product Dimensions (L x W x H): 30.7" x 11.8" x 13.0" -inches

PLBAS122LE

12" Dual Bass Subwoofer Box System

Rear Vented Design with Built-in Illuminating LED Lights

Technical Specs:

- Construction Materials: 15mm Particle Board + Multilayer Board
- Power Rating: 2x600 Watts Max Power
- Voice Coil: 2.0"
- Impedance: 4 Ohms
- Magnet: 2x50 Oz
- Sensitivity: 91 dB
- Frequency Response: 30-300 Hz
- Remote Control Battery Operated, Requires (1) x 'CR2025' Batteries
- Battery Type: 3V Lithium Battery
- Battery Life: Up to 2+ Hours
- Product Dimensions (L x W x H): 33.8" x 12.6" x 14.9" -inches

Features:

- Built-in Illuminating LED Lights
- Class-D Powered Enclosure Amplifier
- Rear Vented Design
- High Powered 8-inch Woofers with a Silver Paper Cone
- Rubber Edge Suspension
- Smooth Carpet Finish
- 4 Layer Dual Voice Coil
- Binding Post Connectors
- Perfect for Truck and Behind the Seat
- High-Quality Construction

What's in the Box:

- Subwoofer Box
- LED Remote Control
- Output Wire for Amplifier



Questions? Issues?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com

California Prop 65 Warning

⚠️ WARNING:

This product contains Nickel carbonate which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.

For more info go to: www.P65warnings.ca.gov