PLMG65 - PLMG85Single Voice Coil Car Subwoofer


PyleUSA.com


4-Ohm Car Audio Powered Subwoofer, Paper Cone with Cloth Edge



WIRING CONNECTION

Connect the power amplifier to the positive and negative terminals accordingly as shown.



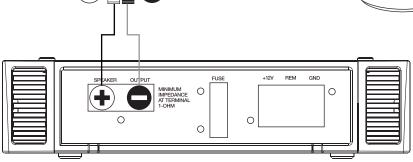

Features:

- Paper Cone with Cloth Edge
- High-Powered Car Subwoofer
- Lab Tested Pro Audio Woofer Performance
- SVC: Single Voice Coil Sub Speaker Design
- High Strength Engineering Plastic Basket
- Quick Connect Speaker Terminal Plate
- Compatible with Sealed Enclosure Speaker Box Audio Setup
- Impressive Bass Response, Low-Resonance Frequency Output
- Designed for Custom Audio Car, Truck, Mobile Vehicle Applications

What's in the Box:

• SVC Subwoofer with Grill



PLMG65

6.5" Single Voice Coil Car Subwoofer

150 Watts at 4-Ohm Car Audio Powered Subwoofer, Paper Cone with Cloth Edge

Technical Specs:

- Construction Materials: Engineered ABS
- Power Handing: 150 Watts MAX, 75 Watts RMS
- Impedance: 4 Ohm
- Voice Coil: 1.5" -in
- Voice Coil Type: High-Temp Aluminum
- Magnet Size: 20 Oz
- Magnet Type: Barium Ferrite Magnet
- Frequency Response: 80Hz-5500Hz
- Sensitivity: 92 dB (1w/1m)
- Product Dimensions: 6.8 " x 6.8" x 3.1" -inches
- Cutout Size: 3.07" -inches

PLMG85

8" Single Voice Coil Car Subwoofer

250 Watts at 4-Ohm Car Audio Powered Subwoofer, Paper Cone with Cloth Edge

Technical Specs:

- Construction Materials: Engineered ABS
- Power Handing: 250 Watts MAX, 125 Watts RMS
- Impedance: 4 Ohm
- Voice Coil: 1.5" -in
- Voice Coil Type: High-Temp Aluminum
- Magnet Size: 25 Oz
- Magnet Type: Barium Ferrite Magnet
- Frequency Response: 60Hz-5000Hz
- Sensitivity: 93 dB (1w/1m)
- Product Dimensions: 8.6 " x 8.6" x 3.7" –inches
- Cutout Size: 7.40" -inches

California Prop 65 Warning



This product contains Nickel carbonate which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.

For more info go to: www.P65warnings.ca.gov

Questions? Issues? We are here to help! Phone: (1) 718-535-1800

Email: support@pyleusa.com