

4" -inch Waterproof
Rated Marine
Tower Speakers

PYLE
PyleUSA.com

Wakeboard Subwoofer Speaker System



MODEL	PLMRWB45W / PLMRWB45B
	PLMRLEWB46W / PLMRLEWB46B
	PLMRLEWB47WB / PLMRLEWB47BB

Numeral	Characterization of Ingress Limit
0 or X	Not evaluated
1	Dripping water: vertical
2	Dripping water: 15° tilt
3	Spraying water
4	Splashing water
5	Jetting water
6	Powerful Jetting water
7	Temporary immersion
8	Continuous immersion


Table II. The second numeral in an IP code indicates the degree of protection from moisture.

USER GUIDE

INSTALLATION GUIDE

Picture 1.


1. The base of the bracket.
2. The cover of the bracket, is fixed by 2 mounting screws.

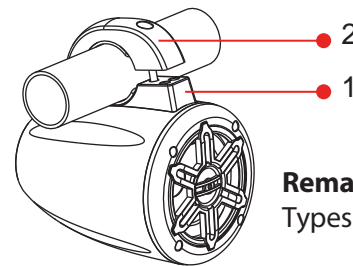

Remark:
Types of screws: M6x35

Picture 2.

Mounting hole dimension

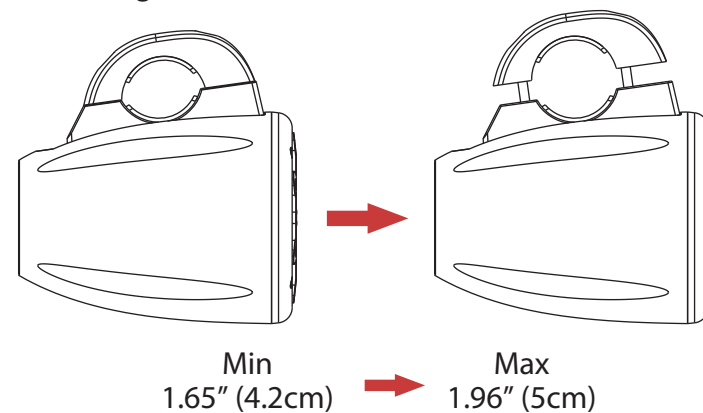

MODEL	PLMRWB45W	PLMRWB45B	PLMRLEWB46W	PLMRLEWB46B	PLMRLEWB47WB	PLMRLEWB47BB
Power Output	300 Watt MAX					
Sound System	4" Subwoofers 1.0" Tweeters					
Color	White	Black	White	Black	White	Black
Built-in LED Lights			✓	✓	✓	✓
Wireless BT Streaming					✓	✓


Wiring Diagram

- As shown in pictures, A port is **DC12V/LED/BTPOWER**, **B port is LED POWER**

- **A and B Connect to DC12V Power.**

As shown in pictures, will be the first two speakers docking, C and D is Speaker Wire, Connect C's Positive to D's Positive, C's Negative to D's Negative, Black Wire is Negative, Blue Wire is Positive.

- **The connection is complete.**

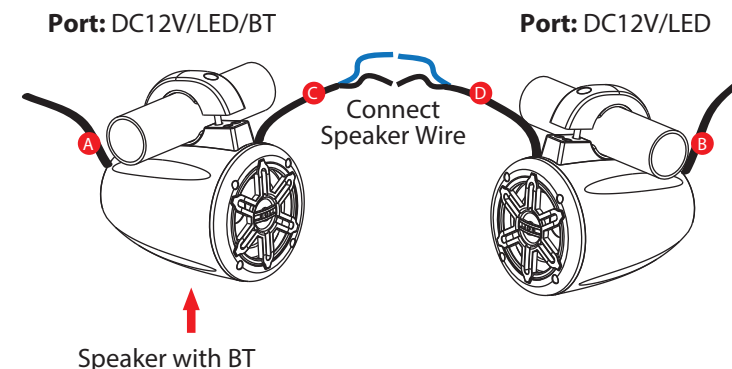

How to connect Wireless BT?
Search the device on your phone/tablet (device name Pyle), enter the password (0000), when a beep sound is heard, the connection is successful.
Now you can play music.

Features:

- Includes (2) Wakeboard Tower Speakers
- Waterproof Marine Grade Rated Construction
- Rugged & Weather-Resistant Housing
- Compact Mountable Design
- 2-Way Full Range Audio Speaker System
- Titanium Dome Tweeters
- Long Excursion Subwoofers
- Anti-Corrosion, UV Resistant Coating
- Integrated Universal Roll Bar Mounting Clamps

Technical Specifications:

- Waterproof Marine Grade Rating: IP-44
- Boat Roll Cage / Roll Bar Support Size: Up to 1.96" (5cm)
- Tweeter Type: Titanium Dome
- Frequency Response: 70hz-20kHz
- Impedance: 4 Ohms
- Magnet: 10 Oz
- Sensitivity: 90 dB
- Construction Material: Engineered ABS Grills
- Speaker Housing Dimensions (L x W x H): 5.4" x 5.4" x 7.0'-inches
- Speaker Housing Size (L x W x H): 5.4" x 7.6" x 7.0'-inches (with Mounting Bracket)

What's in the Box:

- (2) Marine LED Speakers
- Integrated Mounting Clamps

Questions? Comments?
We are here to help!
Phone: (1) 718-535-1800
Email: support@pyleusa.com