PLMW63 - PLMW83

Single Voice Coil Car Subwoofer


4-Ohm Car Audio Powered Subwoofer. Injection Cone with Rubber Edge






WIRING CONNECTION

Connect the power amplifier to the positive and negative terminals accordingly as shown.



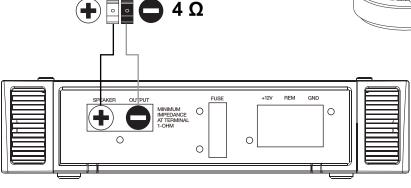

Features:

- Injection Cone with Rubber Edge
- High-Powered Car Subwoofer
- Lab Tested Pro Audio Woofer Performance
- SVC: Single Voice Coil Sub Speaker Design
- Massive Butyl Rubber Surround
- High Strength Engineering Plastic Basket
- Quick Connect Speaker Terminal Plate
- Compatible with Sealed Enclosure Speaker Box Audio Setup
- Impressive Bass Response, Low-Resonance Frequency Output
- Designed for Custom Audio Car, Truck, Mobile Vehicle Applications

What's in the Box:

SVC Subwoofer



PLMW63

6.5" Single Voice Coil Car Subwoofer

150 Watts at 4-Ohm Car Audio Powered Subwoofer, Injection Cone with Rubber Edge

Technical Specs:

• Construction Materials: Engineered ABS

• Power Handing: 150 Watts MAX 75 Watts RMS

Impedance: 4 OhmVoice Coil: 1.0" -in

• Voice Coil Type: High-Temp Aluminum

Magnet Size: 20 Oz

Magnet Type: Barium Ferrite Magnet
Frequency Response: 50Hz-5000Hz

• Sensitivity: 91 dB (1w/1m)

• Product Dimensions: 6.6 " x 6.6" x 2.6" –inches

PLMW83

8" Single Voice Coil Car Subwoofer

200 Watts at 4-Ohm Car Audio Powered Subwoofer, Injection Cone with Rubber Edge

Technical Specs:

• Construction Materials: Engineered ABS

• Power Handling: 200 Watts MAX, 100 Watts RMS

Impedance: 4 OhmVoice Coil: 1.5" -in

• Voice Coil Type: High-Temp Aluminum

• Magnet Size: 25 Oz

• Magnet Type: Barium Ferrite Magnet

• Frequency Response: 40Hz-5000Hz

Sensitivity: 91 dB (1w/1m)

• Product Dimensions: 8.3 " x 8.3" x 2.9" –inches

California Prop 65 Warning



This product contains Nickel carbonate which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.

For more info go to: www.P65warnings.ca.gov

Questions? Issues?
We are here to help!
Phone: (1) 718-535-1800
Email: support@pyleusa.com