





USER MANUAL

TITLE : GUITAR AMPLIFIER

MODEL : PVAMP60

www.pyleaudio.com

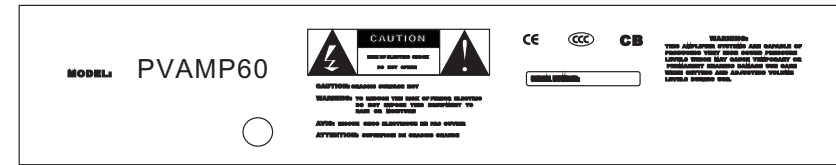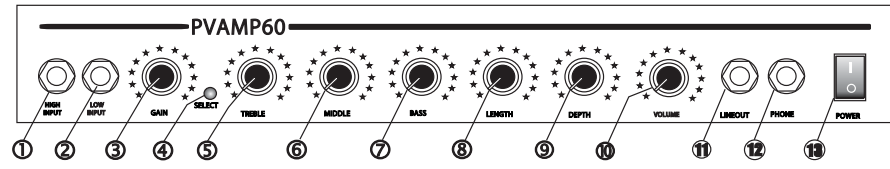

Functions

1. **HIGH INPUT**
Plug in a hi-level signal here.
2. **LOW INPUT**
Plug in a low-level signal here.
3. **GAIN**
This is the distortion intensity control for the overdrive channel.
4. **SELECT**
This switch is select the drive channel or normal channel.
5. **TREBLE**
This equalization control adjusts the amount of boost in the high frequency range
6. **MIDDLE**
This equalization control adjusts the amount of boost in the middle frequency range.
7. **BASS**
This equalization control adjusts the amount of boost in the low frequency range.
8. **LENGTH**
This equalization control reverb length
9. **DEPTH**
This equalization control reverb depth
10. **VOLUME**
This is the overall level control for the normal channel.
11. **LINEOUT**
This is a 1/4"jack for hooking up external speakersto the amplifier.
12. **PHONE**
This is a 1/4"3-conductor stereo headphone jack for plugging in headphones.
13. **POWER**
This on/off switch provides power the unit.

TECHNICAL SPECIFICATIONS

Power	~ 110V, 60 Hz
Rated Power	60 Watts MAX
Load Impedance	8 Ohms
Speaker	8"
Signal/Noise Ratio	≥ 70dB
Frequency Response	20HZ to 15KHZ
Dimension	15.75" x 8.27" x 13.58"
Weight	22 lbs.

CAUTION: CHASSIS SURFACE HOT.
WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE.
AVIS: RISQUE DE CHOC ELECTRIQUE NE PAS OUVRIR.
ATTENTION: SUPERFICIE DE CHASSIS CHAUDE.