nutrichef
by **PYLE**

PWIRBBQ40
Smart Wireless BBQ Thermometer
USER MANUAL

Get to know the device

Status Indicator

Cable

Power ON/OFF Pairing Button

Battery Cover

Probe

Put in the Battery

+
CR2032
3V
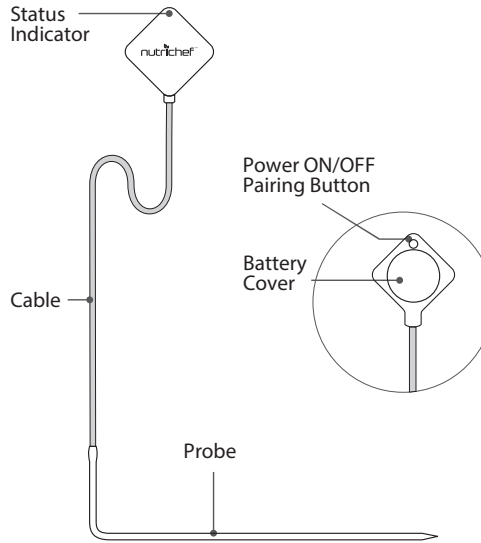
1. Twist the battery cover counterclockwise to unlock.
2. Put in batteries, make sure the side with an icon of + is facing outside.
3. Twist the battery cover clockwise to lock.

Download the APP
Search the keyword '**easybbq**' in Appstore or Google Play, or scan the following QR code with your phone. Download and install it for free.

EasyBBQ app

Pair with your phone

1. Press and hold the power button on the device for 3 seconds to power on.
2. Keep the blue-tooth switch of your phone on.
3. Launch the app, and follow the instrucions in the app to pair and activate the device:
   Press the Pairing Button (in the back of the device); or, scan the bar code on the package or on the device.
4. Connected successfully.

Status Indicator

Blinking Green

Solid White

Blinking Blue

Once paired the device with your phone, you don't need to do it again, unless you change to other phones.

Insert the device
Insert the probe into the food, make sure the front tip of the probe is in the center of the food to get accurate temperature.

DO NOT put the device directly in fire flame.
Keep the main unit as far as possible to fire.

Enjoy your barbecue time

Choose food type and preference for the food where each probe is inserted, the app will display its current and tagert temperature.

When the food is ready, the app and the device will alarm.

Options

Preference Display

Current Temperature

Target Temperature

Temperature History

Connection Status

Timer

Preference Setup

The user interface of the app may be changed when update. Please follow the instructions in the app.

Power ON/OFF
Power ON:
Press and hold the power button for 3 seconds.

Power OFF:
• Press and hold the power button for 3 seconds, with the LED turning into white for 1 second.
• Auto-off after 8 hours out of connection with phone.

WARNING
DO NOT put the probes directly in the fire flame. The device has limited water resistence, **DO NOT** wash the main unit in water! Please clean it with a wet cloth instead.

PC (Polycarbonate) main unit
212°F for continual monitoring
Cable
662°F for continual monitoring
Sensor probe
788°F
for instantaneous test
662°F
for continual monitoring

Operation is subject to the following two conditions:
1. This device may not cause interference and
2. This device must accept an interference that may cause undesired operation of this device.

App Store is a service mark of Apple Inc.
Google Play is a service mark of Google Inc.

FC   CE   RoHS   FDA

PYLE