
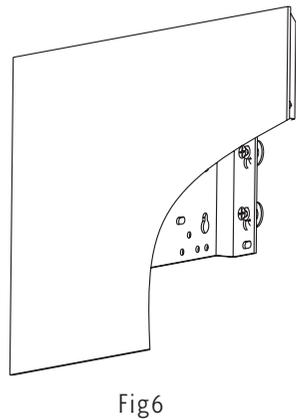


Step3: Install TV

According hole's location at the back of TV to choose relevant hole on the panel.(have chosen on first step), please pay attention to that hole chosen must be equalization, using bolt and washer to install panel on TV (fig 4,5)

Firstly put up the TV with an assistant in fitting position on the wall,making the trough on the panel fit to the wall button,then according trough to embed the LCD into the wall button. AS shown in Fig6.


Carefully: Don't force the bolt to LCD hole, avoiding damage to people and instrument .Don't use electronics drill to fasten screw.

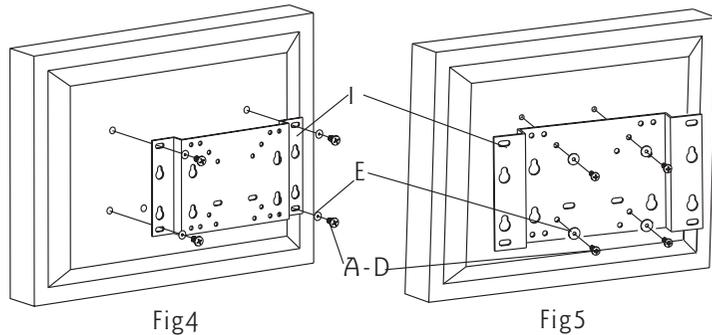

Flat unadjustable wall mount

INSTALLATION GUIDE


Item No.:PWLB605

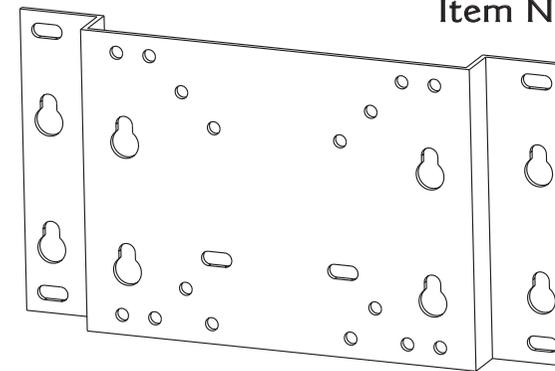

- TV Size Rang: 10" - 15"
- According VESA standard to design
- Distance to the wall is only 18mm
- Simply for installing: finish installing between panels by gliding and embedding
- Max load capacity: 15Kg/33lbs

Parts:

NO	Qty	Name
I	1	TV Plate
A	4	M4 8mm bolt
B	4	M4 12mm bolt
C	4	M5 8mm bolt
D	4	M5 12mm bolt
E	8	M5 washer
F	4	Long bolt
G	4	Wall anchor
H	4	Wall Button

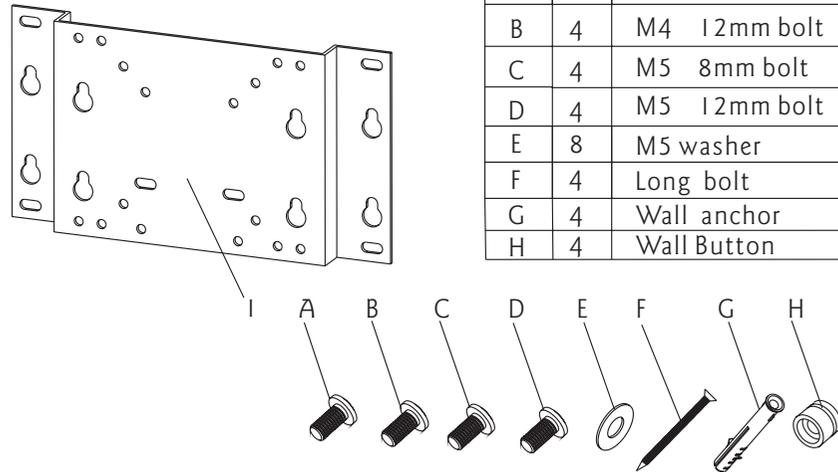

Step I : Choose your installing location on the TV panel.

This product has two kinds of installing location, which is positive and negative. According to the wall, choose the installing location rationally for display.

Considering display with varied "VESA" standard connects with stand directly. This product establishes four kinds of installing styles which are according to the "VESA" standard.

- A-VESA 50(50mmx50mm)
- B-VESA 75(75mmx75mm)
- C-VESA 100(100mmx100mm)
- D-VESA 200(200mmx200mm)

If the installing hole of your display is not "VESA" standard, this stand offers an installing location. If it still can't satisfy, you need an optional carrying instrument to attach the display to the stand. If you need a carrying instrument, please contact your dealer.

When choosing location of A, B, C, D, choose the hole's location same as 2 in Fig 1 when installing hole on the wall, or choose hole location of I.

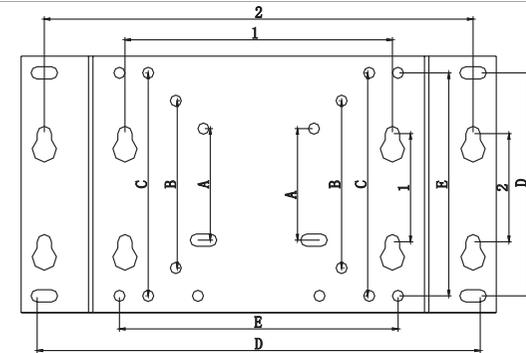


Fig 1

Step2: Install wall mount

Installing ways of batten wall

Using an electronic stake detector in the mount location, which is in the center of the stake. Making a mark in the center of the stake on the wall. Lay the TV panel on the installing location flatly, using a template, marking the hole in the center of the stake where the TV panel has been chosen. Using a 2mm needle to drill 4 holes of 30mm depth. Install the wall button (H) carefully by using the provided long bolt and M5 washer.

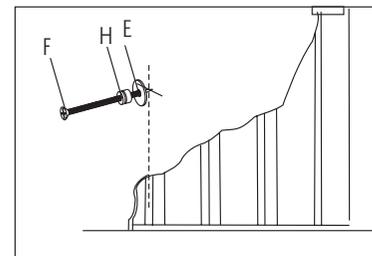


Fig 2

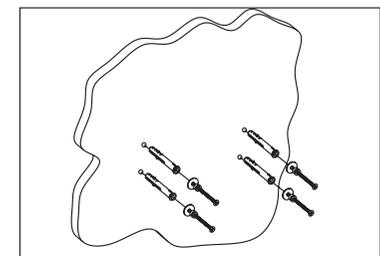


Fig 3

Install ways of cement and beton

Lay the wall mount on the installing location, using a template, marking the hole location on the wall where the TV panel has been chosen. Using an 8mm needle to drill a hole of 40mm depth, embedding the wall anchor cover into the hole, and strike the wall slightly. Install the wall plate carefully by using the provided long bolt and washer. (Fig 3)

Careful: Wall anchor cover just for wall of cement and beton. Don't use wall anchor cover on dry floppy wall for installing stand.