




Model	PWRC55BT	PWRC65BT	PWRC85BT
Speaker Size	5.25" inch	6.5" inch	8" inch

Dual In-Wall / In-Ceiling Bluetooth Speaker System

2-Way Full Range Stereo Speakers with Wireless Streaming Ability and Magnetic Grill

PWRC55BT - PWRC65BT - PWRC85BT

Installation Guide

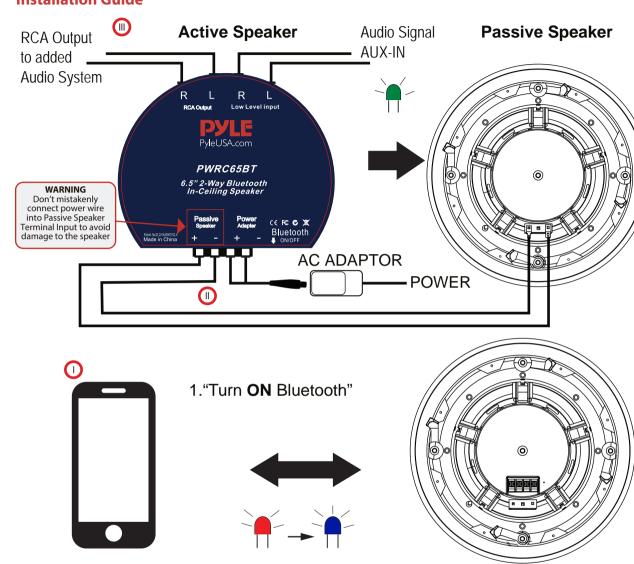

LED INDICATOR

Status	Active Speaker	
POWER ON	RED	
Bluetooth Connection	BLUE	
RCA/AUX-IN	GREEN	

2."Choose PyleUSA"

"Bluetooth Pairing Tone"

Please read these instructions carefully before using this product, and save this manual for future use.

State of the art product carefully designed and manufactured for vehicle use and has been thoroughly tested to ensure consistent and reliable performance.

If you have any question about the installation or operation of your **PYLE** speaker system which are not answered by this user manual, contact your dealer in first instance

PWRC55BT - PWRC65BT - PWRC85BT INSTALLATION

Ways to connect

Bluetooth Connection

Connect the active speaker to a power source via a included power adapter. Upon successful connection a red light will illuminate in active speaker. Switch **ON** Bluetooth on your phone / tablet and select Bluetooth connection name of 'PyleUSA'. Upon successful connection you will hear a connection tone and blue light will illuminate on active speaker. Conversely upon Bluetooth disconnection, you will hear a disconnection tone and red light illuminates on active speaker.

- Using included speaker wire to daisy Chain connection in between Active and Passive speakers to build up the complete stereo system
- RCA Low level input allow user to have any AUX-IN option additionally while Bluetooth feature is disconnected. The active speaker stays green light illumination while RCA AUX-IN. Vice Versa, while Bluetooth is connected, the Bluetooth signal dominates the audio system.
- Optional 'RCA Output' allows user to wire and extend wider audio system. The added pair is to receive audio signal via 'Low Level Input' and turn Bluetooth pin OFF on added active speaker to avoid Bluetooth connection confusion. The way of daisy chain connection in between active and passive speaker on added pair audio system is same as above point 2 method. The active speaker on added speaker system stays at green light illumination. User can use 'RCA Output' and 'Low Level Input' to add up numerous pair speakers to build up optimal audio system for different places.

PWRC55BT - PWRC65BT - PWRC85BT

In-Wall/In-Ceiling 2-Way Speakers

Dual In-Wall / In-Ceiling Bluetooth Speaker System 2-Way Full Range Stereo Speakers with Wireless Streaming Ability, Magnetic Grill

MODEL	PWRC55BT	PWRC65BT	PWRC85BT
Speaker Size	5.25" inch	6.5" inch	8″ inch
Power Output	240 Watt MAX	300 Watt MAX	360 Watt MAX
Frequency Response	80Hz-20kHz	70Hz-20kHz	55Hz-22kHz
Sensitivity	87 +/- 2 dB @ 1W/1M	89 +/- 2 dB @ 1W/1M	91 +/- 2 dB @ 1W/1M
Cut-out Diameter	4.7" -inches	5.77" -inches	7.25" -inches
Active Speaker Mounting Depth	2.94" -inches	3.15" -inches	4.4" -inches
Passive Speaker Mounting Depth	2.78" -inches	2.90" -inches	3.76" -inches
Power Supply	110/240V (12V Power Adapter)	110/240V (12V Power Adapter)	110/240V (18V Power Adapter)

Features:

- In-Wall / In-Ceiling Home Speakers
- Active + Passive Speaker System
- Built-in Bluetooth Wireless Receiver
- Universal Flush Mount for Any Flat Surface
- Flat & Thin, Slim-Style Removable Speaker Grill
- Convenient Magnetic Speaker Grill Quickly Attaches / Detaches
- Digital Sound Processing Amplifier
- Ability to Connect External Devices
- RCA Audio Aux (L/R) Connectors
- 2-Way Full Range Stereo Sound Reproduction
- 1/2" High Compliance Polymer Tweeter
- Polypropylene Cone with Rubber Edge
- Cut-Out Template for Easy Installation
- Integrated Clamp-Type Mounting Brackets
- Environmentally Friendly ABS Construction
- Perfect for Custom Audio Applications
- Used for Home, Office & Business

What's in the Box:

- (1) Active Speaker
- (1) Passive Speaker
- (2) Speaker Connection Wires, 9.8'ft.
- Cut-Out Template
- Power Adapter

Technical Specs:

- Speaker Style: Round / Circle
- Impedance: 8 Ohm



