

PYLE
PyleUSA.com



PADH15BTA

15" Stage & Studio Speaker

Wireless BT Streaming PA Loud-Speaker System
with MP3/USB/SD Playback (1400 Watt)

WARNING!

**CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK,
DO NOT REMOVE THE COVER OF THIS UNIT.**

**THERE ARE NO USER - SERVICEABLE PARTS INSIDE.
REFER ALL SERVICING TO A QUALIFIED TECHNICIAN.**



The lightning flash with arrow head symbol within an equilateral triangle is intended to alert the user to the presence of "dangerous" voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of Electric shock to humans. Users should exhibit extra safety when this symbol appears in this instruction manual and follow all precautions as they are stated.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in this manual.

SAFETY INSTRUCTION


1. Please read the user manual carefully before use and retain for future reference.
2. The power supply must match the demand of the device with reliable ground wire.
3. All covering signal should be complied with the demand of device.
4. The device should be located far away from high temperature, moisture and powerful electromagnetic field.
5. Max operating temperature is 113°F.
6. No naked flame sources, such as lighted candles, shall be placed on the product.
7. Clean only with dry cloth – The appliance should be cleaned only as recommended by the manufacturer.
8. When not in use, unplug the unit from the mains.
9. **To establish a safe level:**
 - Start your volume control at a low setting.
 - Slowly increase the sound until you can hear it comfortably and clearly, and without distortion.
10. Only use suitable means of transportation if you want to move the speaker.

Note:

- Once the **BLUETOOTH** devices are paired, there is no need to pair them again.
- If the speaker is connected via Bluetooth device but does not play with sound, please turn off nearby devices and only leave one device to re-connect with the speaker.
- When inserting the USB/SD Card , make sure the direction you selected is correct. Never insert violently to avoid damaging the USB/SD Card or the unit. If it doesn't work, please check if the direction is correct.
- Turn off and pull out the USB/SD before turning off the speaker.

CONTROL PANELS

- LCD MP3 Player
SD port
USB port



A. ►|| Short press: Play/Pause

In the **USB** mode, long press to track **FOLDER**

In FM mode, long press to automatically search for Radio Stations.

B. MODE: Press to switch between **USB/ SD/ FM/BLUETOOTH**


C. ↻: Press to switch between RA (Repeat all)/RO(Repeat One)/RR(Repeat randomly)

D. ◀◀: Short press: Switch Previous Song, Long press **Voice DOWN**


E. ▶▶: Short press: Switch next Song, Long p

F. ^{DSP}EQ : Digital Signal Processing

- XLR Mic 1 input
- 1/4 Connector for Line 1 input
- Echo effect adjustment for Mic 1 Input
- Level for Mic 1 and Line 1 input
- XLR Mic 2 input
- 1/4 Connector for Line 2 input
- Echo effect adjustment for Mic 2 Input
- Level for Mic 2 and Line 2 input
- RCA Line input
- RCA Line Output
- Line and MP3 Selector
- Level for Line and MP3 input
- DSP: Digital Signal Processing
- 5 band graphic equalizer
- Echo repeat times adjustment
- Echo period time adjustment
- Power indicator
- Volume control of total amplifier
- Echo level adjustment
- VOLTAGE SELECTOR** for 110V and 220V
- Power switch
- AC input

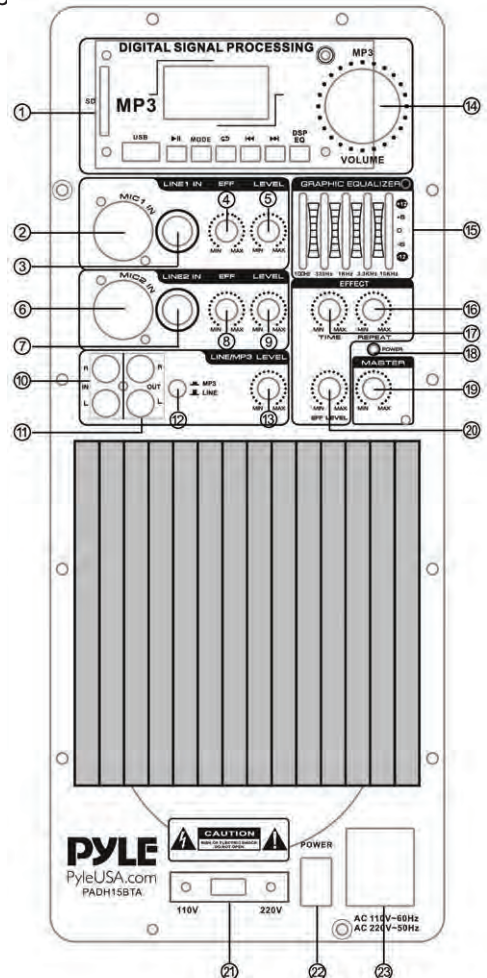

REMOTE CONTROL

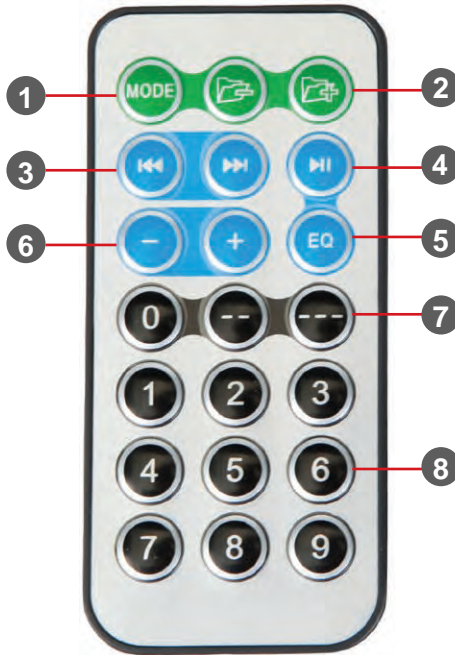

1. Select the audio source of MP3 player:

USB device or SD memory card Bluetooth

2. Back / forward track file

3. Back / forward track song

4. Stop/ Play button

5. Select EQ options

6. Decrease / Increase volume

7. Directly Selector

8. Buttons Selection

Remote Control: 3 V  Battery

PADH15BTA

15" Stage & Studio Speaker - Bluetooth PA Loud-Speaker System with MP3/USB/SD Playback (1400 Watt)

Features:

- Molded Cabinet PA Loud-Speaker
- High-Powered Audio Output
- Sound System: 15" Speakers, 1.75" Tweeter
- Bluetooth Wireless Music Streaming Ability
- Active 2-Way, Full Range Speaker
- MP3 Digital Audio File Support
- USB Flash & SD Memory Card Readers
- ID3 Tag Song Readout Info, Song Title, Artist
- (2) XLR 3-Pin Connectors
- 1/4" Line Input 6.35mm connector
- (2) 1/4" 3.5mm Microphone/Guitar/AUX
- Independent Channel Adjustable Volume & Effect Control
- 5-Band Graphic EQ
- Digital Echo Effects Control
- RCA (L/R) Audio Line Input/Output Jacks
- Cabinet Speaker Stand Mount Support, 38mm
- Rugged & Heavy-Duty Molded Cabinet Housing
- Ability to Connect Additional Microphones, Instruments, DJ Equipment
- Perfect for On-Stage Performances, Crowd Control, Public Gathering Events

What's in the Box:

- 15"-inch PA Speaker
- Remote Control
- Power Cable

Bluetooth Wireless Streaming:

- Instantly Receives Wireless Music Streaming Audio
- Works with All of Your Favorite Devices (iPhone, Android, Smartphones, iPad, Tablet, MP3 Player, etc.)
- Bluetooth Version: 4.0
- Bluetooth Network Name: 'PyleUSA'
- Bluetooth Wireless Range: Up to 65' ft.

Technical Specs:

- Speaker Power Output: 1400 Watt MAX
- Subwoofer Type: 15" Long Throw
- Tweeter Type: 1.75" Titanium Horn Driver (44mm)
- Subwoofer Frequency: 46Hz-2500Hz (± 10 dB)
- Speaker Magnet: 60 oz.
- Impedance: 4 Ohm
- Speaker Sensitivity: 98 \pm 2dB 1W/1M
- S/N Ratio: ≥ 85 dB
- T.H.D.: 10%
- Frequency Response: 46-20Khz (± 10 dB)
- Maximum USB/SD Card Support: Unlimited
- Digital Audio File Support: MP3, WMA, WAV
- Power Supply: 110V/220V, Switchable
- Speaker Dimensions (L x W x H): 16.54" x 15.04" x 26.97" -Inches
- Sold as: 1

PYLE

PyleUSA.com



VISIT US ONLINE:

Have a question?

Need service or repair?

Want to leave a comment?

PyleUSA.com/ContactUs

PYLE