

# PLMR24DK

## Compact 3.5" Wall Mount Home Speakers

3-Way Indoor/Outdoor Speaker System, Camo Style, 200 Watt (Pair)

**PYLE**  
PyleUSA.com

### USER MANUAL

#### FEATURES:

- Dual Passive Speaker System
- Universal Indoor/Outdoor Mountable
- Hunting Camouflage Pattern Design Style
- Marine Grade Construction
- Waterproof Rated & Weather-Resistant
- Connect & Stream Audio from External Devices
- 3-Way Full Range Stereo Sound Reproduction
- Bass Reflex Vent for Added Bass Response
- Built-in Capacitor Crossover Network
- Lightweight & Compact Size
- Removable Rustproof Mesh Grills
- Quick Connect/Disconnect Speaker Terminals
- Used for Home, Garage, Yard, Deck, Porch, Patio

#### TECHNICAL SPECS:

- Power: 200 Watt Peak (100 Watt RMS)
- Marine Grade Rating: IP-44
- Subwoofers: 3.5" Aluminum Injection Cones
- Midranges: 1.75" Wide Dispersion Cones
- Tweeters: 1.0" Superior Domes
- Construction Material: Engineered ABS
- Frequency Response: 70Hz - 21kHz
- Magnet Structure: 24 oz.
- Impedance: 4 Ohm
- Power Supply: 120V (DC 12V Power Adapter)
- Dimensions (L x W x H): 5.25" x 3.75" x 3.75" -Each
- Sold as: 1

### Installation Guide:

#### MOUNTING THE BRACKET

1. Remove the bracket knobs and the bracket from the speaker
2. Hold the bracket up to the mounting surface. "Plmr" can be mounted either horizontally or vertically, hold the bracket so that the speaker wire fits through the large, circular wire hole in the bracket, align the bracket to be square with the surrounding (**Use A level for accuracy**)
3. Mark the locations of the three shaped screw holes, use all of the holes
4. Drill pilot holes into the mounting surface
5. Gently pull the speaker wire through the wire hole in the center of the mounting bracket, the bracket so that the holes all line up
6. Use your hardware to attach the bracket to the mounting surface


#### FINAL ADJUSTMENTS

1. After checking that the speaker is in-phase and works correctly, angle the speaker for the best sound
2. Hand tighten the bracket knobs only, power tools may over-tighten the knob, and strip the threads of the insert
3. Check that the entire installation is safe and secure

#### WHAT'S IN THE BOX:

- (2) Wall-Mount Speakers
- Speaker Wire, 11.5' ft.
- Removable Mounting Brackets

#### MOUNTING

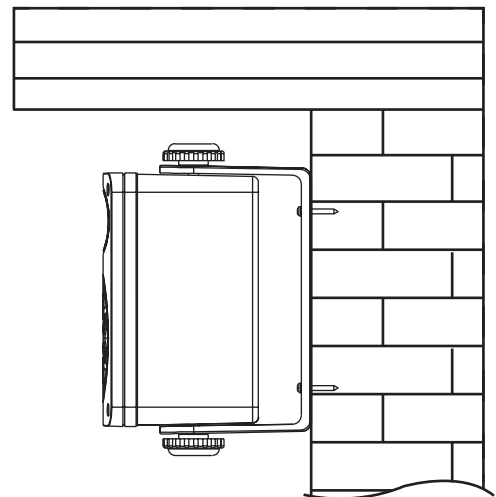

#### VISIT US ONLINE:

Have a question?  
Need service or repair?  
Want to leave a comment?

[PyleUSA.com/ContactUs](http://PyleUSA.com/ContactUs)

**PYLE**