







6.5" Subwoofers, 500 Watt MAX



PPHP288B 8.0" Subwoofers, 600 Watt MAX

PPHP266B - PPHP288B

Wireless BT Speaker & Microphone System

Portable Stereo Karaoke Speaker with Wired Mic, Built-in LED Party Lights, MP3/USB/ Micro SD Readers, FM Radio

USER MANUAL

WARNING



1. **DO NOT** place objects on top of the device, as objects may scratch the device.



2. **DO NOT** expose the device to dirty or dusty environments.



3. **DO NOT** insert any foreign objects into the device.



4. **DO NOT** expose the device to strong magnetic or electrical field.



5. **DO NOT** use the device in the rain



6. Please check with your Local Authority or retailer for proper disposal of electronic products.



7. **DO NOT** disassemble the device. Only a certified service technician should perform repair.




8. The device has apertures to disperse heat. **DO NOT** block the device ventilation, the device may become hot and malfunction as a result.

Illegal operation may cause personal injury, which could be fatal and may cause damage to property.

CONTROL BOARD FUNCTIONS

- 1. DC 9V/1.5A input
- 2. Charge LED indicator
- 3. Power button
- 4. LED button
- 5. USB and MICRO SD jack could support Mp3
- 6. 3.5MM audio input jack
- 7. 6.5MM microphone input jack
- 8. 6.5MM guitar input jack
- 9. Music volume knob
- 10. Play/Pause on USB/MICRO SD mode, scan channel on FM mode
- 11. Last music on USB/MICRO SD mode, last channel on FM mode
- 12. Short press for choosing different input signal, press and hold for voice cancelling function on USB/MICRO SD/BT MODE
- 13. Record function on USB/MICRO SD mode
- 14. Next music on USB/MICRO SD mode, next channel on FM mode
- 15. Short press for repeat song function, long press for microphone priority ON/OFF
- 16. Microphone volume control knob
- 17. Music treble control knob
- 18. Music bass control knob
- 19. Microphone echo control knob
- 20. Guitar volume control knob

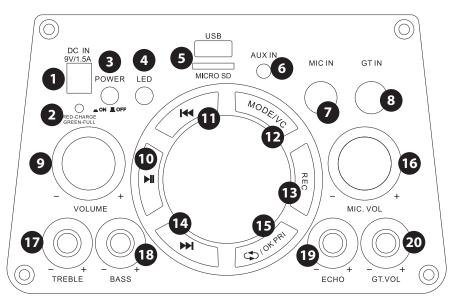

2 www.PyleUSA.com www.PyleUSA.com 3

REMOTE CONTROL FUNCTIONS

- 1. Standby button
- 2. Choose input AUX/FM/BT/USB signal
- 3. Mute button
- 4. Play/Stop button on MP3 mode, scan function on FM mode.
- 5. Next song on USB/Micro SD card, next channel on FM mode.
- 6. Previous song on USB/Micro SD card, last channel on FM mode
- 7. EO effect on MP3 mode
- 8. Increase speaker volume
- 9. Choose song number directly on MP3 mode
- 10. Stop button
- 11. Decrease music volume
- 12. Repeat song on USB/Micro SD memory card

TROUBLESHOOTING

Fault	Possible Cause	Solution	
No sound	 No input sound source. Volume is too low. 	 Use a better music signal. Adjust volume. 	
Distortion of sound	Volume too high. Speaker may be damaged	Turn down the volume. If speaker is damaged, repair or replace it.	
Karaoke does not work	 Microphone plug is not fully inserted. Microphone switch is not on. Microphone volume knob is at the lowest position. 	 Plug microphone properly into the socket. Turn on microphone switch. Adjust microphone volume properly. 	
MP3 does not play	 The audio format in the U disc is incorrect. Improper operation has caused a process disorder. USB disc is disconnected. 	 Convert audio format into Mp3 format. Reboot the machine. Insert USB disc properly. 	

PPHP266B - PPHP288B

Wireless BT Speaker & Microphone System

Portable Stereo Karaoke Speaker with Wired Mic, Built-in LED Party Lights, MP3/USB/Micro SD Readers, FM Radio

MODEL	PPHP266B	PPHP288B
Power Output	500 Watt MAX	600 Watt MAX
Sound System	6.5" -in. Subwoofer Speakers (x2)	8.0" -in. Subwoofer Speakers (x2) 1"Tweeter
Total Speaker Size (L x W x H)	9.5" x 9.1" x 18.5" -inches	11.4" x 10.4" x 23.2" -inches

Features:

- High-Powered PA Speaker System
- Portable Stereo Boombox Speaker Style
- Wireless BT Music Streaming Ability
- Includes Wired Microphone for Home Karaoke Fun
- Multi-Color Flashing LED Party Lights
- Built-in Rechargeable Battery
- Dual Subwoofer Speaker Tower Design
- Full Range Stereo Sound Reproduction
- Ported Subwoofer Enclosure for Extended Bass
- FM Radio with Digital LCD Display
- Top Panel Audio Control Center
- Unique Audio Recording Mode
- Connect & Stream Audio from External Devices
- MP3 Digital Audio File Playback
- Aux (3.5mm) Input Jack

- USB Flash Memory Reader
- Micro SD Memory Card Reader
- (2) 1/4"-inch (6.5mm) Microphone/ Guitar Instrument Inputs
- Master Volume, Mic Volume, Treble, Bass Adjustable
- Battery Level Indicator Light
- Convenient Integrated Carry Handle
- Rugged & Durable Molded Cabinet Design
- Used for Public Gatherings, Crowd Control, Home Karaoke
- For Indoor / Outdoor Use

Wireless BT Streaming:

- Built-in BT for Wireless Music Streaming
- Simple & Hassle-Free Pairing
- Works with All of Today's Latest Devices
- Smartphones, Tablets, Laptops, Computers, etc.
- Wireless BT Version: 5.0
- Wireless BT Network Name: 'PYLEUSA'
- Wireless Range: Up to 32'ft.

Audio Recording Mode:

- It's Easy: One Button Record Activation
- Record Audio as Streamed through the Speaker System
- Ability to Record Vocals via Microphone
- Recording Files save via USB Flash & Micro SD Ports
- Can Also Record FM & Wireless BT Streaming Audio
- Audio File Type Created: MP3

What's in the Box:

- PA Speaker System
- Wired Microphone
- Remote Control
- Power Adapter

Technical Specs:

- Speaker Style: Molded PA Speaker Cabinet
- Wired Mic Cable Length: 9.8'ft.
- Impedance: 3 Ohm
- Frequency Response: 55-20kHz
- S/N Ratio: 60dB +/-3dB
- SPL: 94dB (1W/M)
- T.H.D.: <1%
- USB Interface Type: 2.0
- Digital Audio File Support: MP3
- Maximum USB/Micro SD Flash Support: Up to 32GB
- Mic Nominal Current Drain: <100mAh
- LED Light Power Control Switch: ON / OFF
- Construction Material: Engineered Polypropylene (PP)
- Battery Life: Up to 2 Hours (Charge Time Approx. 4Hours)
- PA Speaker Rechargeable Battery: 7.4V Li-ion, 1800mAh 13.3Wh, 120g
- Battery Operated Remote: (1) x CR-2025 Button Cell, Included
- Power Cable Length: 3.6' f.t
- Power Supply: 120/240V (9V Power Adapter)

Ouestions? Issues?

We are here to help! Phone: (1) 718-535-1800 Email: support@pyleusa.com



This product can expose you to a chemical or group of checmicals, which may include "Lead and lead compounds" which is known in the state of California to cause cancer, birth warning: defects, or other reproductive harm. For more info, go to https://www.p65warnings.ca.gov/.

6 www.PyleUSA.com www.PyleUSA.com 7