

# PYLE

PyleUSA.com



## *PSBWP4*


Portable Wireless BT Speaker System  
2 Channel BT Speaker, TWS Function, Micro SD Support,  
RGB Lighting with Rechargeable Battery

***USER GUIDE***

To ensure correct operation and avoid damage,  
please read this user manual carefully before using this product.

**Product Details:**

- |                      |                         |
|----------------------|-------------------------|
| 1. Power On/Off      | 8. Backward/Volume Down |
| 2. TWS Button        | 9. 5V 1A Output         |
| 3. EQ Button         | 10. Charging Jack       |
| 4. Play/Pause        | 11. AUX IN port         |
| 5. Battery Indicator | 12. Micro SD slot       |
| 6. RGB Light         | 13. Reset Jack          |
| 7. Forward/Volume Up |                         |

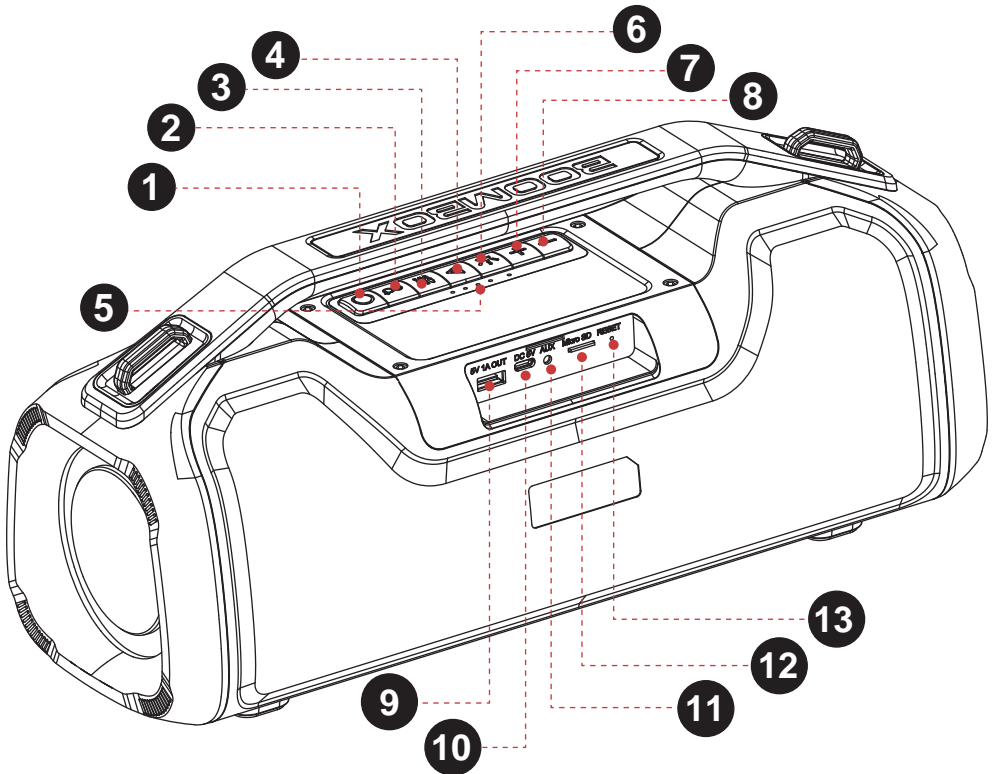

**Power On/Off:** Press and hold the Power button to turn the speaker on and off.

### **Wireless BT Streaming:**

- Turn the power button to “ON”, the speaker enter Wireless BT mode automatically.
- Activate Wireless BT of mobile phone and search for device name “PyleUSA” then connect it.
- Play the music from your mobile phone and enjoy.
- Press and hold Forward or Backward button on the device or operate on Mobile phone to select songs you like.
- Press Forward or Backward button to adjust volume up and down.  
Or adjust the mobile phones’ volume.
- Press Play/Pause button on the device or operate on Mobile phones to play/pause the music.
- Press and hold TWS button to disconnect the Wireless BT connection with the mobile device.

### **TWS Function:**

- Turn on two identical speakers you want to pair, both under Wireless BT mode.  
Only need to set one of the two units.
- Press the “TWS” button to pair, the TWS button will keep lighting after paired successfully.
- Make Wireless BT connection with your mobile phone to play music by the two paired Speakers to create more powerful surround sound effect.
- Press the “TWS” button again to exit TWS mode.

### **Playing music from Micro SD card:**

- Turn the Power button to “ON”.
- Insert Micro SD card into the slot, the speaker will play the stored music automatically.
- Press and hold Forward or Backward button to select songs you like, short press to adjust the volume up and down.
- Press Play/Pause to play or pause the music.

### **Remark:**

*Under Wireless BT playing mode, insert Micro SD will disconnect the Wireless BT and switch to play the Micro SD card.*

### **Power Bank Function:**

- Turn the speaker on.
- Connect other device to the 5V 1A Out port via a charging cable.

### **AUX-IN:**

- For other compatible music devices or your MP3/MP4 players, use the supplied audio line cable to connect from the device's "Line Out" to the "Aux In" of this device, then enjoy...
- Under any playing mode, when you use the audio cable to connect the device, it will auto-switch to the AUX mode.
- When using an external device, all functions can be controlled by the external device.

### **EQ Introduction:**

This unit offers 2 kinds of sound effect, press EQ button to change the EQ modes.

### **RGB Light**

The RGB light is on when speaker powered on, user can short-press the RGB Light button to turn the light off and on.

### **Activating Voice Assistant:**

- Make Wireless BT connection with your mobile phone.
- Press and hold Play/Pause button to activate voice assistant **SIRI/GOOGLE ASSISTANT.**

### **Hand-free call:**

- Under Wireless BT connection status, if there is an incoming call, user can press Play/Pause button to accept the call or press and hold Play/Pause button to reject the call.
- During the call, user can press and hold Play/Pause button to switch to talking on the phone.
- Press Play/Pause button or operate on mobile phone to end the call.

### **Reset Functionality:**

If the speaker does not turn off or respond, user can short-press the Reset jack with a small round pin to reset the speaker.

### **More Remarks:**

- Default volume is at 30% status of max volume.
- Play time may vary depending on volume level and music style.

### **How to charge:**

- The charger is not included in the package, please charge the speaker via a standard 5V/1-3A charger or via a PC.
- Charge time should be 4-8 hours. After full charging, the 4 LEDs is off when speaker off.

### **IMPORTANT:**

When playing music during charging, please put the volume to middle, because for some music with heavy bass, the charger may not be able to afford the high current temporarily under the maximum volume.

### **Warning:**

- Don't use/store this speaker in extreme temperatures.
- Please store it in cool and dry area, keep away from anything that generates heat, such as radiators, stoves, etc.
- In order to have hearing protection and an extended speaker life, avoid listening to songs on maximum volume.
- When cleaning this speaker, use a soft dry cloth. For more sever stains, please dampen the cloth with water only. Anything else has the chance of dissolving the paint or damaging the plastic.

## **Features:**

- 2.0 Channel Portable Wireless BT Speaker
- Splash-proof IPX5
- TWS Function, Double Enhanced Stereo Sound
- EQ Function Offering Dynamic Sound Effect
- Optimized Google Assistant and Siri Voice Control
- Hands-free Mic for Easy Picking Up the Call
- RGB Lighting
- With A2DP Wireless Streaming Music BT
- Micro SD Card Support
- With A2DP BT, wireless stream music from any Wireless BT-enabled device
- Power bank function support 5V, 1A output
- Line-in Function, Suitable for PC, MID, TV, and Other Audio Devices
- Built-in Lithium Rechargeable Battery 7.4V 3600mAh
- Strong Carry Handle, Easy to Take Out
- Without Adapter or Outlet Plug
- Perfect for Beach, Pool Side, Boat, and More Outdoor Activities

## **Wireless BT Connectivity:**

- Instantly Stream Music from Your Devices
- Works with All Your Favorite Wireless BT Devices  
(iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Wireless BT Version: V5.0
- Wireless BT Protocol: A2DP AVRCP GAVDP HFP
- Wireless BT Network Name: 'PyleUSA'
- Wireless Range: Over 32'+ Ft.

## What's in the Box:

- Portable Wireless BT Speaker
- Charging USB-TYPE-C cable
- Audio Cable

## Technical Specs:

- Power Output: 40W (20W x 2) RMS Power
- Sound System: 2 Speakers
- Speaker Type: Compact & Portable Boombox
- Impedance: 4 Ohm
- Frequency Response: 80Hz-12kHz
- S/N Ratio: 85dB
- T.H.D.: 5%
- USB Interface Type: Power Bank Function
- Digital Audio File Support: MP3/WAV/FLAC/ APE (only Fast and Normal)
- Battery Life: Approximately 3 Hours (at Max Volume with Lights Off)
- Maximum Micro SD Flash Support: Up to 32GB
- Construction Material: Engineered LG,
- Rechargeable Battery: 7.4V Li-iOn, 3600mAh - 26.64Wh - 182.5g
- USB Power Cable Length: 2.6 ft (0.8m)
- Power Bank: 5V 1A Output
- Power Supply: DC 5V 1~3A USB Adapter
- Product Size: 15.35" x 6.85" x 5.35" -inches



WARNING:

This product can expose you to a chemical or group of chemicals, which may include "Cadmium (Cd)" which is known in the state of California to cause cancer, birth defects, or other reproductive harm. For more info, go to <https://www.p65warnings.ca.gov/>.

# PYLE

PyleUSA.com



**VISIT US ONLINE:**

*Have a question?*

*Need service or repair?*

*Want to leave a comment?*

[PyleUSA.com/ContactUs](http://PyleUSA.com/ContactUs)

PYLE

***Questions? Issues?***

We are here to help!

Phone: (1) 718-535-1800

Email: [support@pyleusa.com](mailto:support@pyleusa.com)