

BLUETOOTH TROLLEY SPEAKER

USER MANUAL



Read this manual before use

PWMA825BT

Display Description



▶|| : Stop lighting when reading USB or TF card data U/TF

U/TF : Lighting when playing in USB or TF mode.

↶ : Single Cycle

88:88 : Shows "FM Frequenc!when operating in FM mode

Shows "LINEIN"when operating in Line in mode

Shows "Time"when operating in USB & TF mode

Shows "BT"when operating in Bluetooth mode

Shows "— — — —"when standby.

Shows "PAUS"when stop.

🔋 : Flashing when the power is low , charging is needed.


Mic : Lighting when Microphone is plugged , it is flashing when operate in Microphone VIP function.

Specification

Power Output :	30 W
Speaker Size :	12"*1+3"* 1
R. Frequency :	90HZ-20KHz
S/N Ratio :	≥ 60 dB
Adapter Input :	AC100-240V
Adapter Output :	13.5V A
Battery	4000mAh
Dimension :	W370*D265*H518mm

Packing

PWMA825BT Speaker	*1
Adapter	*1
Wireless Microphone	*2
Aux In Cable	
Manual	

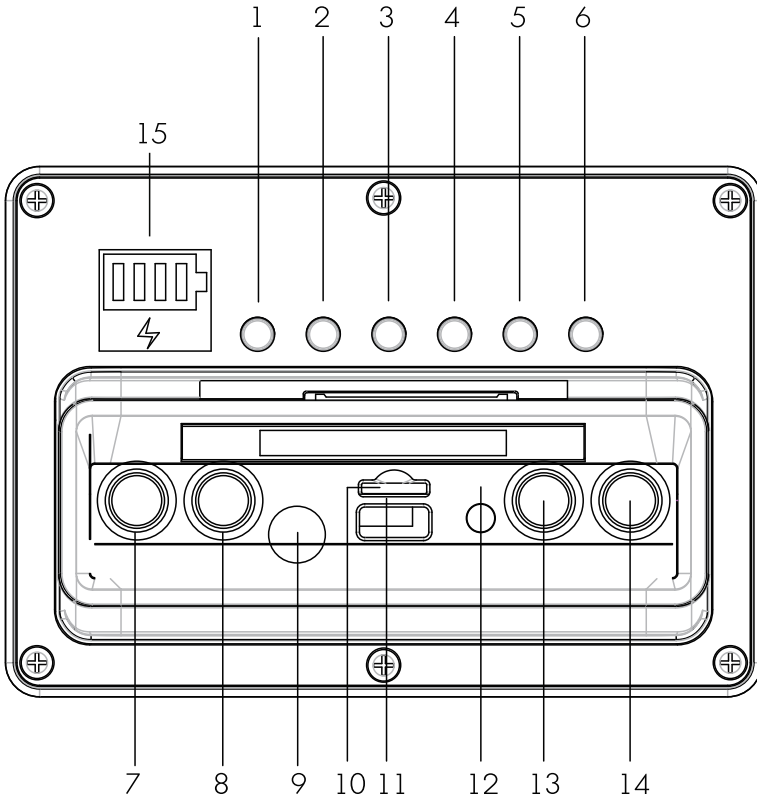

- 1. Mode Button
- 2. Repeat Button
- 3. Microphone VIP
- 4. Skip - Button
- 5. Play/Pause Button
- 6. Skip + Button
- 7. Echo Function Control Dial

- 1. Microphone Volume Control Dial
- 2. Microphone Port
- 3. TF Card Slot
- 4. USB Card Slot
- 5. Line-In Aux. Port
- 6. Master Volume Control Dial
- 7. Bass Volume Control Dial
- 8. Charging & Battery Volume Indicator Light

General Function Description

1. **Master Volume** : Turn to adjust master volume .
2. **Treble Volume** : Turn to adjust treble volume .
3. **Echo Effect** : Turn to adjust echo effect .
4. **Mic Volume** : Turn to adjust mic volume .
5. **Mode** : To choose other mode when operating , sequence :
BT - Line in - USB - TF - FM , Priority to play in USB or TF card mode
when insert the USB or TF card

MP3 Function Description

1. **USB** : Playing when insert the USB which save with MP3 music
2. **TF Card** : Playing when insert the TF card which save with MP3 music
3. **Repeat** : While playing music in USB or TF mode ,press to repeat single music or all music .
4. **Play/Pause Button** : In USB or TF mode , press to play or pause , in Line mode, press to mute .
5. **Skip - & + Button** : While playing music in USB or TF mode, short press to go back or forward music , long press to adjust volume .

Bluetooth Function Description

1. **Pairing** : Press mode button to Bluetooth mode , speaker will be under automatic pairing mode and call out " Power on", LED display shows "Br , pair the Bluetooth compatible device by selecting "M31" from the listed devices, speaker will call out "Connected" after paired successful,Bluetooth pairing system will be off if there is no device connecting after 5 minutes.
2. **Music Playing** : Press Play/Pause , Skip + / - Button to play music .

Microphone VIP Function

1. Microphone VIP : Whiling music playing and plugged microphone , it will enlarge the voice received from mic and lower the music volume after pressed Microphone VIP button . Music volume will go back originally if there is voice received from microphone , press Microphone VIP button again to cancel the function .

Battery Volume And Charging Indication

1. Four green light shows the battery volume , starting from left one - around 20% , second - around 40% , Third - around 80% , All lighting - full .
2. Should charging when the left one lighting only , the red lightning symbol is on when charging , it is off when battery full .
3. Speaker is setting to be battery protection mode when all power indication light is off , and the music volume will be lower to 70% automatically .

External Battery Function

1. Speaker designed with external 12V battery function , it can be use after connect the Red (+) , Black (-) of speaker to external battery 1+1, (-) correctly.

Feature

1. Stylish, fashionable and elegant appearance.
2. High-performance lithium battery with long play time.
3. Strong Bass , clear and rich vocal
4. New Bluetooth solution , compatible with most of market devices
5. Support USB and TF card Playing , Microphone Input .
6. Cool Design With Battery Volume Indicator.

